

QuietHourTM

Quiet Comfort,
From the Ground Up.

LUXURY VINYL TILE

 **Tarkett** Hospitality

QuietHourTM

QuietHourTM is designed for the moments guests value most—when the noise of everyday life fades away and an effortless sense of serenity settles in.

With an attached acoustic pad, QuietHour LVT softens each step and helps reduce the sound of footfalls above, creating a quieter, more restful environment. Enhancing this feeling of comfort, QuietHour is FloorScore[®] certified, contributing to better indoor air quality.

Delivering superior acoustical performance, this glue down LVT solution provides exceptional durability while remaining easy to maintain. Effortlessly elegant and enduring, QuietHour brings together strength, quietness, and beauty—a foundation for spaces designed around rest and renewal.



Scan to Learn More







Birchhaven 0001



Canopy Oak 0002



Chestnut Ridge 0003



Crestwood 0004



Oakmere 0005



Pecan Oak 0006

QuietHour™

LVT with attached acoustic pad | 7" x 48" | 6 designs

Warm, wood visuals range from deep, grounding tones to lighter, uplifting shades, bringing a natural sense of tranquility to the space.




Tranquil, elevated experience

Attached acoustic underlayment absorbs sound and reduces room-to-room sound. IIC 64 acoustic rating* drastically improves comfort and contributes to sound sleep.



Guaranteed durability

Withstand extremes with a premium LVT construction, protective finish and commercial-grade wear layer.



Smoother Transitions

Matches height of most ethos® backed carpet tile without need for transition strip.



Healthy materials

Free of ortho-phthalates, FloorScore® certified and 15-25% post-consumer recycled content.

* Based on ASTM E492 (6" concrete slab with suspended ceiling)

Color and Visual Variation is inherent in all modular resilient products. As determined by design intent, some patterns and colors can vary slightly or significantly from piece to piece within a pattern. Prior to installation, we recommend reviewing multiple tiles.



Birchhaven 0001



Realistic Embossing








Chestnut Ridge 0003



Birchhaven 0001

QuietHour™ LVT with attached acoustic pad

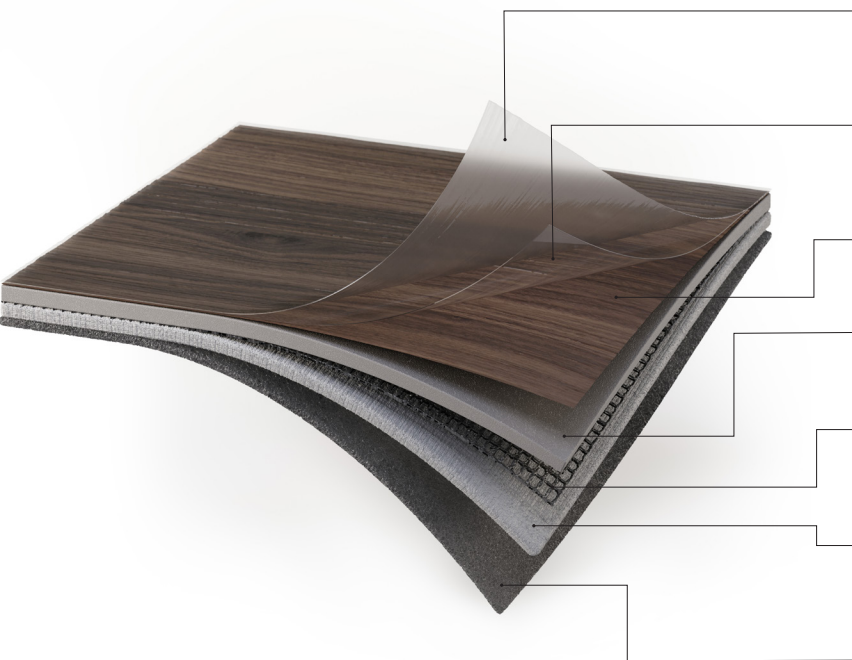

Protective polyurethane surface finish

offers superior stain, scuff and scratch resistance for everyday wear. Easy to clean and low-maintenance.

20-mil wear layer

resists abrasion and daily foot traffic keeping the visual looking newer for longer.

Printed visuals

delivers unique design aesthetic with realistic wood details

Core Layer

provides perfect balance of function and performance

Fiberglass

provides enhanced dimensional stability and resists the effects of temperature changes

Balancing layer

prevents curling and doming and provides a stabilizing base bridging the core and acoustic backing

Attached acoustic pad

absorbs sound, reduces room-to-room sound and improves cushioning and underfoot comfort

Benefits of glue down LVT



Better Acoustics Underfoot

Glue-down LVT is bonded directly to the subfloor eliminating the hollow space beneath floating, clic installations that can contribute to clicking or drum-like sound underfoot.



Better Long-term Repairability


Floating floors can be fast to install initially, but localized repairs may be more involved. Glue-down makes it possible to address a small damaged area rather than disturbing a much larger section of floor



Better Suited to Heavy Rolling Loads

Glue down LVT won't flex or shift as readily as a floating system.

Acoustic benefits of QuietHour™ LVT

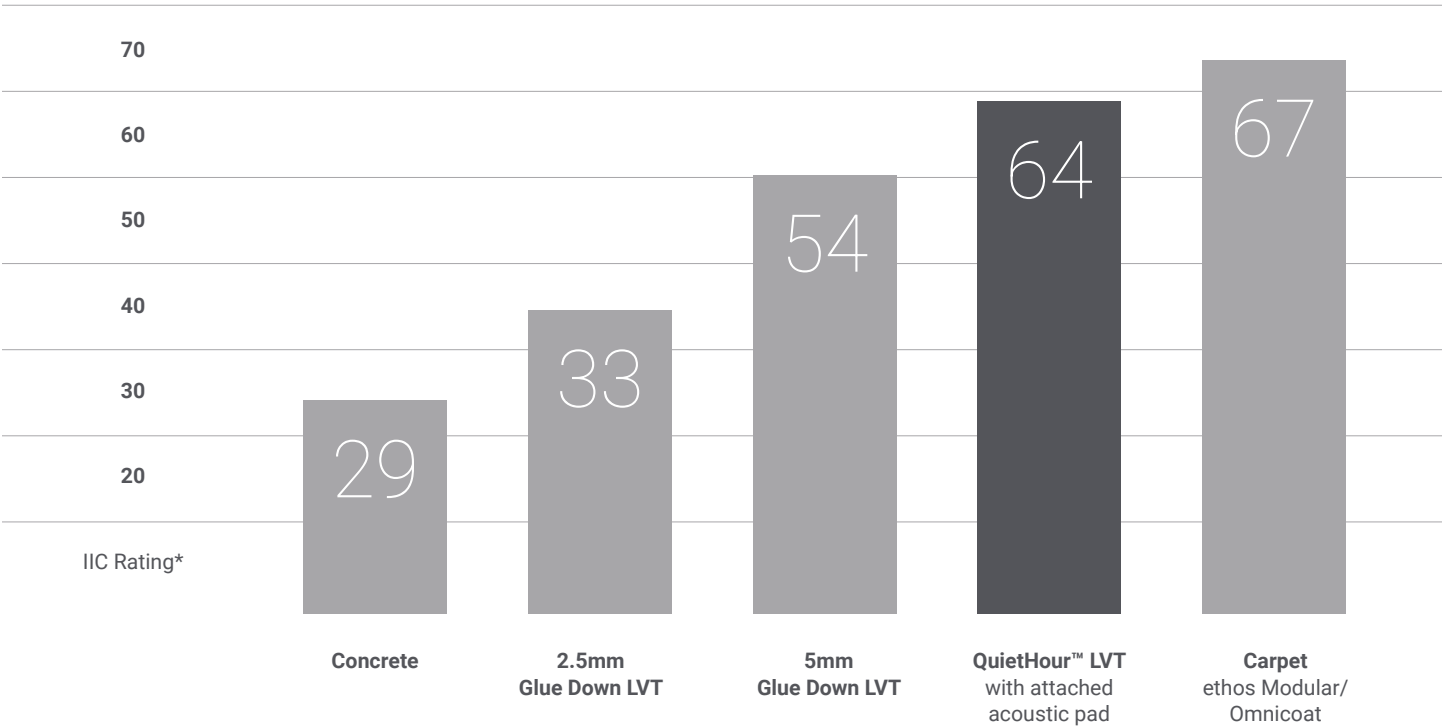

The QuietHour™ Difference

Impress guests with a tranquil, elevated experience.

- **IIC 64 acoustic rating** drastically improves comfort (6" concrete slab + suspended ceiling)
- Attached acoustic underlayment absorbs sound and reduces room-to-room sound
- Contributes to sound sleep experience for guests
- Variety of on-trend visuals and colorways
- Realistic embossing gives authentic wood feel

Typical IIC Ratings

IIC, or Impact Insulation Class, is the impact sound rating that measures how well a floor-ceiling system reduces structure-borne noise from footsteps, dropped objects, and furniture movement.

- **Below 40:** Impact noise is loud and disruptive; fails standard building codes.
- **50–55:** Minimum legal threshold for most multi-family apartments, condos, and commercial builds.
- **60+:** High-performance standard preferred for luxury condos, high-end hotels, and maximum quiet.
- **Luxury Condos & Hotels:** IIC 60+ targeted for premium acoustic comfort.

* Based on ASTM E492 (6" concrete slab with suspended ceiling)

Every step matters™

Pecan Oak 0006

Tarkett's holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making. For decades, we've been scrutinizing every detail of our business for its impact on resources like soil, water, and air—because when you're trailblazing a more sustainable future, **every step matters**.

The **proof** is in the numbers.



Circular economy



Certifications you can trust



Transparency you can trust



Healthy impacts



Global excellence

94%

of our raw materials are third-party assessed for their impact on human and environmental health based on Cradle to Cradle criteria.

69%

of raw materials are abundant, rapidly renewable, or recycled.

13

zero-waste-to-landfill manufacturing plants

2.1 million lb.

of flooring recycled in 2024 in North America

2011

started working with EPEA to integrate Cradle to Cradle principles into every facet of our business

2013

first commercial flooring Certified **Asthma & Allergy Friendly**®

2022

Powerbond® RS is the first soft surface product in the industry to be Certified **Asthma & Allergy Friendly**®.

100 ppm

raw materials content revealed down to 100 parts per million

When most manufacturers reveal raw materials content down to just 1,000 ppm, there's simply no contest.

We've been providing Material Health Statements since 2013 to give you peace of mind about the content of our products.

99%

of flooring solutions have low VOC emission levels—10x lower than the most stringent world standards.

100%

ortho-phthalate-free vinyl production; first company to eliminate ortho-phthalates from all products

2010

first flooring manufacturer to join the UN Global Compact

2016

Began reporting to the Carbon Disclosure Project (CDP). In 2025, Tarkett scored A, the CDP management level.


2020

first assessment by EcoVadis. In 2025, Tarkett's score of 86/100 earned us a Platinum medal and placed us in the top 1% of rated companies.

2023

SBTi deemed our target ambition in line with a 1.5°C trajectory, currently the most ambitious designation available through the SBTi process.

Running Line Rug Program

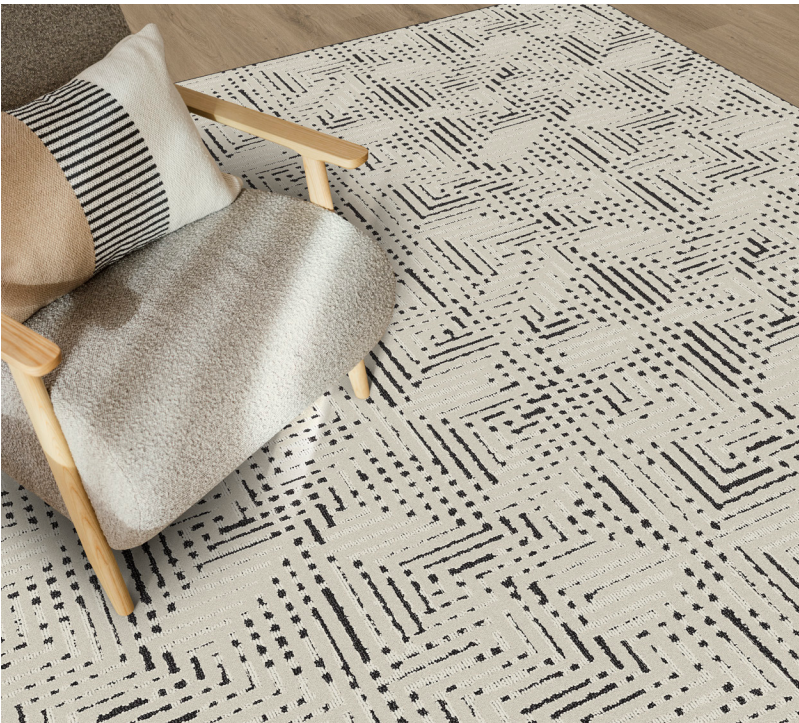


With our running line area rug portfolio, we make it easy. Our curated selection of tufted solution-dyed nylon rugs are cut to order. Just choose your style, shape and size. Your rugs will be ready to ship within two weeks,* no minimums required. Simply contact your sales representative to place an order.



** Lead times are estimates and may vary by demand or quantity exceeding 20 rugs. Contact your Sales Representative to discuss.*

Visualizer Studio

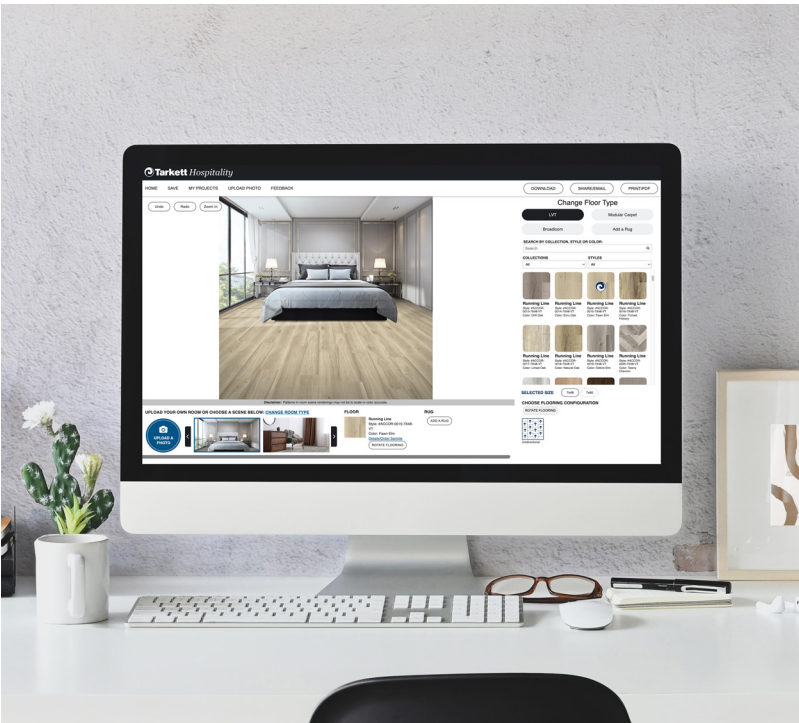

Visualize the extensive line of Tarkett Hospitality running line broadloom carpet, carpet tile, area rugs and LVT, including QuietHour™ in a variety of hospitality environments or upload a photo of your space to bring your vision to life.





Canopy Oak 0002

Specifications

LUXURY VINYL TILE

Classification:	ASTM F1700 Class III, Type B
Total Thickness:	0.1979 in. (5 mm)
Acoustical Backing Layer:	0.039 in. (1 mm) IXPE
Wear Layer:	20 mil (.020" 0.51 mm)
Edge Treatment:	Micro-Bevel
Material:	Ortho-Phthalate-Free, 100% Virgin Material
Reusable Content:	100% Reclaimable
Nominal Size:	7 in. x 48 in. (177.8 mm x 1,219.2 mm) 12 planks/carton, 28 Sq.Ft./carton 50 cartons/palette, 43.25 lbs./carton
Installation System:	Glue Down
Scratch/Scuff/Abrasion Properties:	Excellent
Static Load Limit:	ASTM F970 (250 psi, ≤ 0.005 in.)
Dimensional Stability:	ASTM F2199 Passes
Residual Indentation:	ASTM F1914 Passes (PSI Equivalent > 5,000 lbs.)
Heat Stability:	ASTM F1514 Passes
Light Stability:	ASTM F1515 Passes
Impact Sound Reductions:	ASTM E2179 Δ IIC ≥ 20 dB
IIC Impact Sound Rating:	IIC 64*
Resistance to Chemicals:	ASTM F925 Passes
VOC Requirements:	ASTM D5116 Passes < 0.1 mg/m3
Recycled Content:	15-25% Post-consumer
Certifications:	FloorScore®
Transparency Documents:	Product Specific EPD
Warranty:	15 Year Light Commercial

* Based on ASTM E492 (6" concrete slab with suspended ceiling)

Recommended Adhesive

The following adhesive product is recommended for use with QuietHour LVT in multiple installation scenarios.

Adhesive	Moisture RH
959HM High Moisture Substrate Adhesive	99% New concrete
	95% 2+ Year-old concrete



ReStart

We're committed to creating a circular economy where nothing goes to waste. Take part by starting your next project with Tarkett's ReStart® flooring take-back and recycling program. The ReStart program will accept any type of soft surface or resilient flooring from any manufacturer. Join us as we innovate and collaborate towards a healthier future for this generation and those to come.

Transparency

Access to Transparency Documents: Transparency certifications and product details are located on the Tarkett website, ecomedes.com and [mindful MATERIALS](https://mindfulmaterials.com). Visit us on [Ecomedes \(tarkett.ecomedes.com\)](https://ecomedes.com) to find product certification documentation to support green building systems and federal standards.



For more accurate color, design and full repeat visual representation, please contact your local Tarkett Hospitality Sales Rep to view actual product samples. All third-party trademarks are the property of their respective owners.

