



## MetalEdge™ & MetalEdge™ Trim

### Product Specifications

#### 1. PROPRIETARY PRODUCT / MANUFACTURER

1.1. Proprietary Product: Resilient Transitional Mouldings - A.D.A. Compliant

1.2. **Manufacturer:**  
Tandus Centiva US LLC Phone: 800-248-2878  
311 Smith Industrial Blvd.  
Dalton, GA 30721  
www.tandus-centiva.com

#### 1.3. Proprietary Product Description:

1.3.1. **Construction:** Tandus Centiva Transitional Mouldings are manufactured from a homogeneous composition of polyvinyl chloride (PVC), high quality additives and colorants. All Transitional Mouldings comply with A.D.A. requirements of Section 4.5.2 Changes of Level. Tandus Centiva Transitional Mouldings are designed for interior applications only.

1.3.2. **Styles:**  
**ME001:** 0.120" (3.0mm) LVT materials to carpet with total thickness of 0.21" (5.3 mm) to 0.25" (6.4 mm), 0.18" (4.6mm) cap with 0.13" (3.2mm) wide support  
**MET02:** 0.120" (3.0mm) LVT materials to carpet with total thickness of up to 0.21" (5.2 mm), 0.18" (4.6mm) cap with 0.13" (3.2mm) wide support  
**This piece also serves as MetalEdge Trim:** Edge trim for ethos Modular not installed wall-to-wall – see installation instructions for details  
**ME003:** Use in conjunction with **ME004** for 0.120" (3.0 mm) LVT to carpet with a total thickness of 0.26" (6.5 mm) or greater, 0.25" (6.35mm) cap with 0.13" (3.18mm) wide support

#### 1.3.3. Physical Characteristics:

- Length: 12 ft. (3.66m)  
-ME001, MET02, ME003: 12 ft. (3.66m)  
-ME004: 4 ft. (1.22m)
- Packaging: 25 lengths per carton (ME001, MET02, ME003)
- Packaging: 10 pieces per carton (ME004)

#### 2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- Hardness - ASTM D 2240 - Not less than 85 Shore A
- Abrasion Resistance - ASTM D 3389 - 0.22 mg/cycle
- Slip Resistance - ASTM D 2047 - Exceeds Federal Standards and ADA recommendations
- Fire Resistance: ASTM E 648/NFPA 253 (Critical Radiant Flux) - Class 1
- Static Load Limit - ASTM F 970 - Passes with less than 0.005" @ 250 psi (ME004)

#### 3. INSTALLATION

The installation of Tandus Centiva Transitional Mouldings should not begin until the work of all other trades has been completed, especially overhead trades. Areas to receive transitional mouldings shall be clean, fully enclosed, weathertight, and maintained at a uniform temperature of at least 65°F for 24 hours before, during, and after the installation is completed. The transitional mouldings and adhesives shall be conditioned in the same manner. The floor surface shall be smooth, flat, level, permanently dry, clean and free of all foreign material, such as dust, paint, grease, oils, solvents, curing and hardening compounds, sealers, asphalt, and old adhesive residue. **Do not install on exterior surfaces subject to weather.** Glue Down Type Transitional Mouldings and Edge Trim shall be securely adhered to the floor utilizing the manufacturer's recommended adhesive or tape. Special care must be taken to minimize stretching the product during installation to avoid creating gaps between sections. Many of the transitional mouldings may be formed in a radius. Tandus Centiva recommends a radius of not less than 6 feet of greater, pending the cross-sectional profile of the moulding. An actual test should be performed with the mouldings to ensure conformance to the application. Glue Down Type Transitional Mouldings shall be rolled, with a J-hand roller, after installation for proper bonding.





# Tandus Centiva

A Tarkett Company


- 3.1. **Adhesives:**  
Porous and Nonporous Substrates:  
Tandus Centiva CENTI 6000 SP Special Purpose Adhesive  
Application: Trowel  
Refer to the Tandus Centiva CENTI 6000 SP Specification Sheet for application instructions.
- 3.2. **Installation Manual:** Refer to the Tandus Centiva Transitional Mouldings Installation Instructions for complete installation details.
- 4. **AVAILABILITY AND COST**  
Available through Tandus Centiva account representatives nationwide.
- 5. **WARRANTY**  
Limited 2 year warranty. For complete details, contact Tandus Centiva.
- 6. **MAINTENANCE**  
Refer to Tandus Centiva Transitional Mouldings Installation Instructions for complete maintenance details.
- 7. **TECHNICAL SERVICES**  
Samples: Submittal samples for verification and approval available upon request from Tandus Centiva. Samples shall be submitted in compliance with the requirements of the Contract Documents. Accepted and approved samples shall constitute the standard materials which represent materials installed on the project.

For current Installation and Maintenance Instructions, Product Specifications, and other technical data, visit us on the web at [www.tandus-centiva.com](http://www.tandus-centiva.com) or contact Tandus Centiva at 1-800-248-2878.

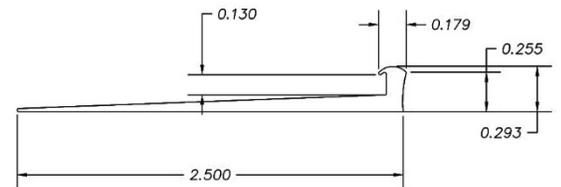


## ME001

ADA COMPLIANT

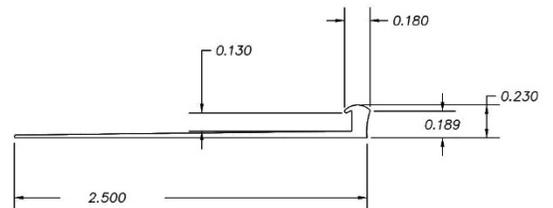


## MET02

ADA COMPLIANT

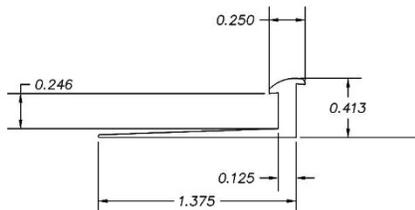

## ME003



## ME004