


Accore™

Specifications

Total Thickness	5 mm	
SPC Core	4 mm	
Acoustic Backing Layer	1 mm	
Wear Layer Thickness	20 mil	
Edge Treatment	Micro-bevel	
Material	Ortho-Phthalate-Free, 100% Virgin Material	
Reusable Content	100% Reclaimable	
Nominal Plank Size	7" x 48"	7" x 60"
Sq. Ft. per Carton	23.64 sq. ft.	23.62 sq. ft.
Planks per Carton	10	8
Cartons per Pallet	55	55
Lbs. per Carton	38 lbs.	38 lbs.
ASTM F3261 (Rigid Polymeric Core) Specification	Class 1, Type A or B, Grade 1, Backing Class B	
ASTM F2199 (Dimensional Stability)	Passes	
ASTM F1914 (Residual Indentation)	Passes	
ASTM F1514 (Heat Stability)	Passes	
ASTM F1515 (Light Stability)	Passes	
ASTM E2179 (Impact Sound Reduction)	Δ IIC \geq 20 dB	
IIC Impact Sound Reduction Rating	68 (ASTM E492, test assembly- 6" concrete slab with drop ceiling)	
ASTM F925 (Resistance to Chemicals)	Passes	
ASTM D5116 (VOC Requirements)	Passes < 0.1 mg/m ³	
Scratch/Scuff/Abrasion Properties	Excellent	
Installation System	Click, Drop Lock System	
Light Commercial Warranty	15-Year	
3-Seasons Warranty	10-Year	
Certification	FloorScore® and Assure Certified™	



by **SCScertified.**

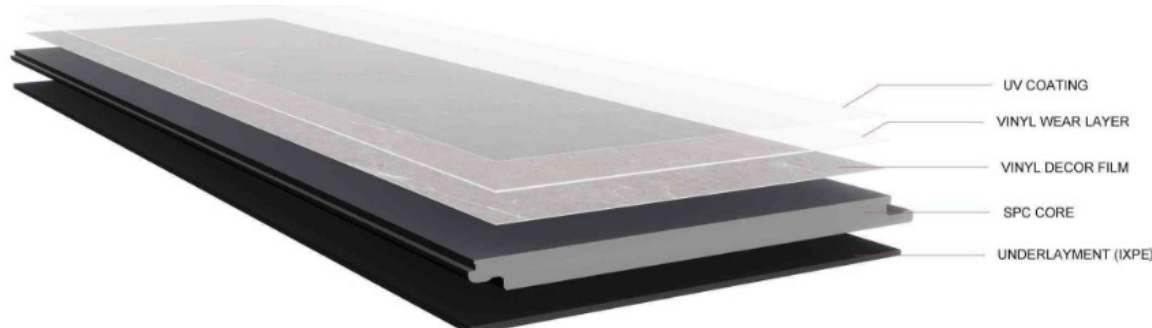

Tarkett Hospitality

285 Kraft Drive | Dalton, GA 30721
USA: 1-800-871-3211

www.tarketthospitality.com



Explore Accore™ Collection