



 **Tarkett** Hospitality



Country Inn & Suites: Gen5



**Country Inn & Suites**  
**Guestroom Broadloom**  
**CPT-001-ALT1**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Broadloom                    |
| Style / Color Number | CI55B / Color: 168           |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Action Bac                   |



### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 12                  |
| Tufted Weight           | 32oz per sq/yd      |
| Finished Pile Thickness | .246 inches average |
| Pattern Repeat          | 24" x 36.01"        |
| Total Overall Thickness | .352 inches average |



### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty** 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.


**Country Inn & Suites  
Guestroom Carpet Tile  
CP-001-ALT2**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Style / Color Number | CI59T / 168                  |
| Product Type         | Carpet Tile                  |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed Nylon    |
| Primary Backing      | Woven PET                    |
| Secondary Backing    | Ethos with Omnicoat          |

### Specifications

|                          |                |
|--------------------------|----------------|
| Size                     | 24"x 24"       |
| Gauge                    | 1/10           |
| Stitches per Inch Tufted | 10             |
| Weight                   | 22oz per sq/yd |
| Total Weight Finished    | 100 oz         |
| Pile Thickness Pattern   | .225 inches    |
| Repeat                   | N/A            |
| Installation Method      | Quarter Turn   |



### Performance

|                           |                          |
|---------------------------|--------------------------|
| Traffic Class (TARR) Pill | Heavy                    |
| Test                      | Pass                     |
| Radiant Panel             | Class I                  |
| Flammability              | ASTM E 648 Class I       |
| Smoke Density             | ASTM E 662 Less than 450 |

LEED Info      Green Label Plus Certified – GLP8320

**Warranty**      10 Year Limited Warranty



**24" X 24" RANDOM CUT TILE  
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Corridor / Elevator Cab Broadloom**  
**CPT-002-ALT1**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Broadloom                    |
| Style / Color Number | CI58B / Color: 168           |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Action Bac                   |

### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 12                  |
| Tufted Weight           | 36oz per sq/yd      |
| Finished Pile Thickness | .281 inches average |
| Pattern Repeat          | 36" x 64.01"        |
| Total Overall Thickness | .444 inches average |



### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty** 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites  
Corridor / Elevator Cab Carpet Tile  
CPT-002-ALT2**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Style / Color Number | CI60T / 168                  |
| Product Type         | Carpet Tile                  |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method Primary   | 100 % Solution Dyed Nylon    |
| Backing Secondary    | Woven PET                    |
| Backing              | Ethos with Omnicoat          |

### Specifications


|                          |                |
|--------------------------|----------------|
| Size                     | 24"x 24"       |
| Gauge                    | 1/10           |
| Stitches per Inch Tufted | 10             |
| Weight                   | 28oz per sq/yd |
| Finished Pile Thickness  | .230 inches    |
| Pattern Repeat           | N/A            |
| Installation Method      | Quarter Turn   |



### Performance

|                      |                                      |
|----------------------|--------------------------------------|
| Traffic Class (TARR) | Heavy                                |
| Pill Test            | Pass                                 |
| Radiant Panel        | Class I                              |
| Flammability         | ASTM E 648 Class I                   |
| Smoke Density        | ASTM E 662 Less than 450             |
| LEED Info            | Green Label Plus Certified – GLP8320 |

**Warranty** 10 Year Limited Warranty



**24" X 24" RANDOM CUT TILE  
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT,** but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Livingroom Area Rug 1**  
**CPT-003**

**Product Information**

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Area Rug                     |
| Style / Color Number | CI54R Color: 652             |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Non-Skid                     |

**Specifications**

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 7                   |
| Tufted Weight           | 36oz per sq/yd      |
| Finished Pile Thickness | .248 inches average |
| Rug Size                | 10' W x 10' L       |
| Total Overall Thickness | .441 inches average |



Edge Treatment: Serge Color 8004



**Performance**

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty** 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn**  
**Livingroom Area Rug 2**  
**CPT-004**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Area Rug                     |
| Style / Color Number | CI56R Color: 652             |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Non-Skid                     |

### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 7                   |
| Tufted Weight           | 36oz per sq/yd      |
| Finished Pile Thickness | .248 inches average |
| Rug Size                | 6' W x 9' L         |
| Total Overall Thickness | .441 inches average |



Edge Treatment: Serge Color 8004



### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty** 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.   
 Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
 IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Flex / Meeting Room Broadloom**  
**CPT-005-ALT1**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Broadloom                    |
| Style / Color Number | CI62B / Color: 652           |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Action Bac                   |



### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 10                  |
| Tufted Weight           | 36oz per sq/yd      |
| Finished Pile Thickness | .248 inches average |
| Pattern Repeat          | 72" x 84"           |
| Total Overall Thickness | .441 inches average |



### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty** 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Flex / Meeting Room Carpet Tile**  
**CPT-005-ALT2**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Carpet Tile                  |
| Style / Color Number | CI63T / Color: 652           |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven PET                    |
| Secondary Backing    | Ethos with Omnicoat          |


### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 24" x 24"           |
| Gauge                   | 1/10                |
| Stitches per Inch       | 9                   |
| Tufted Weight           | 28oz per sq/yd      |
| Finished Pile Thickness | .230 inches average |
| Pattern Repeat          | N/A                 |

### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

|                 |                                 |
|-----------------|---------------------------------|
| <b>Warranty</b> | <b>10 Year Limited Warranty</b> |
|-----------------|---------------------------------|

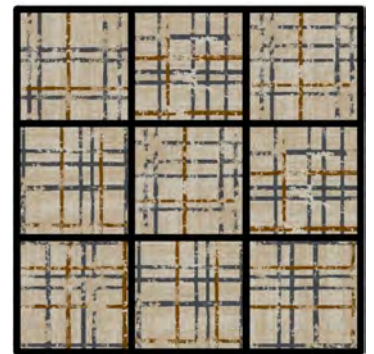

**24" X 24" RANDOM CUT TILE  
 QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.


**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Back of House /Stairwell Broadloom**  
**CPT-006**

### Product Information

|                      |                              |
|----------------------|------------------------------|
| Product Type         | Broadloom                    |
| Style / Color Number | CI61B / Color: 168           |
| Construction         | Multi-Level Pattern Cut/Loop |
| Fiber                | Lextron Enviro-Green Nylon   |
| Dye Method           | 100 % Solution Dyed          |
| Primary Backing      | Woven Polypropylene          |
| Secondary Backing    | Action Bac                   |

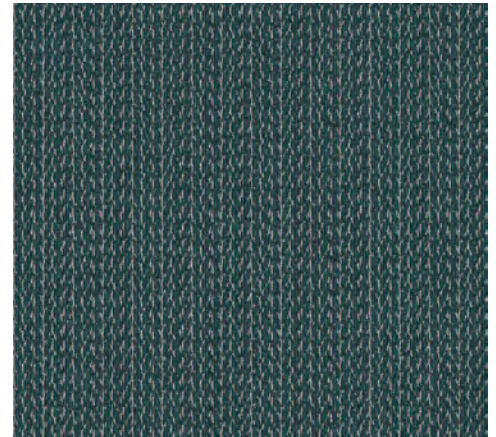

### Specifications

|                         |                     |
|-------------------------|---------------------|
| Size                    | 12'                 |
| Gauge                   | 1/10                |
| Stitches per Inch       | 12                  |
| Tufted Weight           | 36oz per sq/yd      |
| Finished Pile Thickness | .281 inches average |
| Pattern Repeat          | 48" x 35.51"        |
| Total Overall Thickness | .444 inches average |



### Performance

|                  |                                      |
|------------------|--------------------------------------|
| Traffic Class    | Heavy                                |
| (TARR) Pill Test | Pass                                 |
| Radiant Panel    | Class I                              |
| Flammability     | ASTM E 648 Class I                   |
| Smoke Density    | ASTM E 662 Less than 450             |
| LEED Info        | Green Label Plus Certified – GLP2380 |

**Warranty**                      **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
**IT IS NOT A CARPET DEFECT**, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites**  
**Vestibule Inset Walk-Off Mat**  
**CPT-007**

### Product Information

|                      |                               |
|----------------------|-------------------------------|
| Product Type         | Assertive Stria Carpet Tile   |
| Style / Color Number | 04839 / Color 26207 Lead Shot |
| Construction         | Stratatec® Patterned Loop     |
| Fiber                | TDX® Nylon                    |
| Dye Method           | 100 % Solution Dyed           |
| Primary Backing      | Synthetic Non-Woven           |
| Secondary Backing    | Ethos with Omnicoat           |

### Specifications

|                         |                    |
|-------------------------|--------------------|
| Size                    | 24" x 24"          |
| Gauge                   | 5/64               |
| Stitches per Inch       | 9                  |
| Tufted Weight           | 28oz per sq/yd     |
| Finished Pile Thickness | .234inches average |
| Pattern Repeat          | N/A                |
| Total Overall Thickness | .110inches average |



**24" X 24" RANDOM CUT TILE**  
**QUARTER TURN INSTALLATION**

### Performance

|               |                                      |
|---------------|--------------------------------------|
| Traffic Class | Heavy                                |
| Radiant Panel | Class I                              |
| Flammability  | Passes CPSC FF 1-70 (ASTM D-2859)    |
| Smoke Density | ASTM E 662 Less than 450             |
| LEED Info     | Green Label Plus Certified – GLP8320 |

|                 |                                  |
|-----------------|----------------------------------|
| <b>Warranty</b> | <b>Lifetime Limited Warranty</b> |
|-----------------|----------------------------------|

Modular styles with nylon face fiber are covered by a non-prorated Lifetime Limited Warranty issued by Tarkett against excessive surface wear, edge ravel, zippering, resiliency loss of backing, and delamination of the secondary backing from the primary backing containing the face fiber. Lifetime is defined as the period of time during which the product is owned and maintained by the original end-use purchaser in the original indoor installation location. Tarkett Modular products must be installed in accordance with the appropriate Modular Installation & Floor Preparation Instructions and must be maintained in accordance with Tarkett care and maintenance guidelines. The use of Tarkett primers, adhesives, and seam sealers or approved alternatives is required. Failure to conform to these requirements will result in loss of limited warranty coverage.

Moisture and pH testing requirements and limitations are defined in the Tarkett Modular Installation & Floor Preparation Instructions for each Modular product. Product or installation failure due to moisture or pH levels in excess of the limits set forth in these instructions is specifically excluded from limited warranty coverage.

Chair pads are not required, but are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



Soiling visibility is affected by colors and patterns. Information on optimizing your selection can be found at [www.tarkettna.com](http://www.tarkettna.com). **Appearance retention is not covered by this limited warranty.**

## Country Inn & Suites Resilient Flooring

### Resilient Flooring Product Information

**Choice Spec#** LVT-001 Guestroom (Optional)

|                       |                                      |
|-----------------------|--------------------------------------|
| Style Number          | <b>Even Plane: Walnut Allover</b>    |
| Color                 | <b>Walnut</b>                        |
| Product Type          | <b>LVT</b>                           |
| Size                  | <b>9.8" W x 39.4" L</b>              |
| Carton Size           | <b>32.3 sq ft per carton Stagger</b> |
| Installation Pattern: |                                      |

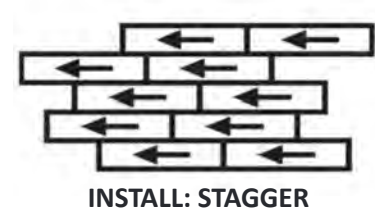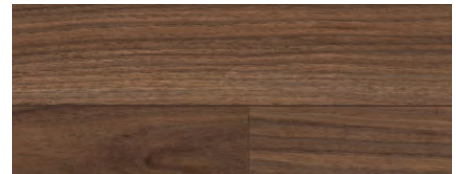

**Choice Spec#** VCT-001 VCT @ Back of House

|              |                                              |
|--------------|----------------------------------------------|
| Style Number | <b>VCT II</b>                                |
| Color        | <b>593 Mushroom</b>                          |
| Product Type | <b>Vinyl Composition Tile</b>                |
| Size         | <b>12" x 12" x 1/8" Thick</b>                |
| Carton Size  | <b>45 sq ft per carton (45 tiles/carton)</b> |



## Country Inn & Suites Carpet Cove Base Options

### Carpet Wall Base Product Information

**Choice Spec#** CPTB-001 Carpet Base @ Guestroom

|              |                            |
|--------------|----------------------------|
| Style Number | 728S                       |
| Color        | 8519                       |
| Product Type | Cut pile bound carpet base |
| Size         | 4"H x 12' Strips           |
| Carton Size  | N/A                        |
| Installation | Direct Glue                |



### Carpet Wall Base Product Information

**Choice Spec#** CPTB-002 Carpet Base @ Corridor

|              |                            |
|--------------|----------------------------|
| Style Number | 728S                       |
| Color        | 8519                       |
| Product Type | Cut pile bound carpet base |
| Size         | 4"H x 12' Strips           |
| Carton Size  | N/A                        |
| Installation | Direct Glue                |



### Carpet Stair Stringer Product Information

**Choice Spec#** CPTB-006 12" Stringer Base @ Stairwell

|              |                            |
|--------------|----------------------------|
| Style Number | 728S                       |
| Color        | 8519                       |
| Product Type | Cut pile bound carpet base |
| Size         | 12"H x 12' Strips          |
| Carton Size  | N/A                        |
| Installation | Direct Glue                |



Enviro-Green yarn has 10% pre-consumer recycled content.  
Recommended for heavy (public space) carpet traffic levels.



**NOTE:** Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.  
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

## Country Inn & Suites Wall Base Options

### Resilient Wall Base Product Information


#### Choice Spec# RB-001 Resilient Base @ Guestroom

|              |                             |
|--------------|-----------------------------|
| Style Number | CB-31                       |
| Color        | 31 Zephyr                   |
| Product Type | Traditional Vinyl Wall Base |
| Size         | 4"H x 1/8" Thick            |
| Carton Size  | 120 ft per carton           |
| Installation | Direct Glue                 |



#### Choice Spec# RB-002 Resilient Base @ Living Room / Marketplace / Breakfast Area

|              |                                   |
|--------------|-----------------------------------|
| Style Number | MW-31-F6                          |
| Color        | 31 Zephyr                         |
| Product Type | Reveal - Millwork Wall Base       |
| Size         | 6"H x .250" Thick x 8 ft. Lengths |
| Carton Size  | 64 ft per carton                  |
| Installation | Direct Glue                       |




#### Choice Spec# RB-003 Resilient Base @ Exercise Room / Back of House

|              |                             |
|--------------|-----------------------------|
| Style Number | CB-29                       |
| Color        | 29 Moonrock                 |
| Product Type | Traditional Vinyl Wall Base |
| Size         | 4"H x 1/8" Thick            |
| Carton Size  | 120 ft per carton           |
| Installation | Direct Glue                 |



#### Choice Spec# RB-004-OPT 8"H Resilient Base

|              |                                   |
|--------------|-----------------------------------|
| Style Number | MW-29-F8                          |
| Color        | 29 Moonrock                       |
| Product Type | Reveal - Millwork Wall Base       |
| Size         | 8"H x .250" Thick x 8 ft. Lengths |
| Carton Size  | 32 ft per carton                  |
| Installation | Direct Glue                       |



# Every step matters

## Sustainability

*Every Step Matters. Tarkett's holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making. For decades, we've scrutinized every detail of our business for its impact on resources such as soil, water, air, and climate—because when you're trailblazing a more sustainable future, every step matters.*

**Corporate Transparency** is fundamental to our values and the way we do business. Third-party assessments serve as a testament to our performance, earning the trust of customers and partners.



### EcoVadis

Tarkett is proud to have been awarded a Platinum sustainability rating by EcoVadis with a score of 81/100, which places us in the top 1% of rated companies. EcoVadis assesses CSR policies, actions, and results across four themes and 21 CSR criteria: environment, labor and human rights, ethics, and sustainable procurement.



### Carbon Disclosure Project (CDP)

Tarkett's "A" score for climate change impact positions us at the leadership level of CDP's grading system.



### Science Based Targets Initiative

Tarkett's 2030 carbon reduction targets are approved by the Science Based Targets initiative (SBTi). We have two 2030 targets guiding nearly every sustainability initiative at Tarkett:

1. Reduce carbon emissions by 30% across Scopes 1, 2, and 3.
2. Increase recycled content in our products from 18% in 2019 to 30% by 2030.



**Start your next project with ReStart®**

We're committed to creating a circular economy where nothing goes to waste. Take part by starting your next project with Tarkett's ReStart® flooring take-back and recycling program. The ReStart program will accept any type of flooring from any manufacturer. Join us as we innovate and collaborate towards a healthier future for this generation and generations to come.

# Contact Us

---

Firstname Lastname Title

Goes Here

ChoiceOrders@tarkett.com

800-871-3211

## **Tarkett Hospitality**

285 Kraft Drive

Dalton, GA 30721

800.871.3211

[www.tarketthospitality.com](http://www.tarketthospitality.com)

© 2026 Tarkett Hospitality