



©Tarkett Hospitality



Rise & Shine: Sea Scheme




Comfort Inn - Sea Scheme
Guestroom Broadloom
CPT-001-ALT1

Product Information

Product Type	Broadloom
Style / Color Number	I374B / Color: 860N
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	12
Tufted Weight	32oz per sq/yd
Finished Pile Thickness	.200 inches average
Pattern Repeat	24" x 36.01"
Total Overall Thickness	.420 inches average

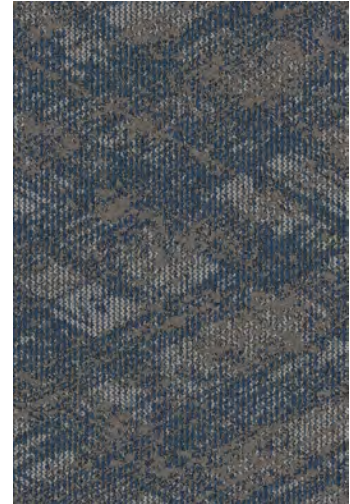

Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.


Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Comfort Inn - Sea Scheme
Guestrooms Carpet Tile
CP-001-ALT2**

Product Information

Style / Color Number	I375T / 860N
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method Primary	100 % Solution Dyed Nylon
Backing Secondary	Woven PET
Backing	Ethos with Omnicoat

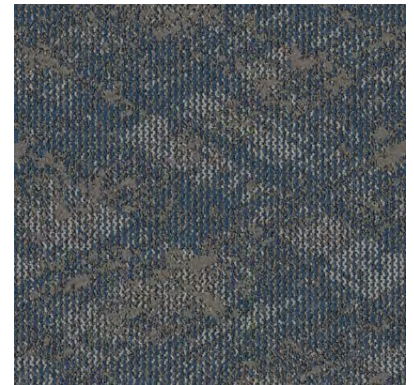

Specifications


Size	24"x 24"
Gauge	1/10
Stitches per Inch Tufted	9
Weight	22oz per sq/yd
Total Weight Finished	119 oz
Pile Thickness Pattern	.218 inches
Repeat	N/A
Installation Method	Quarter Turn



Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty 10 Year Limited Warranty

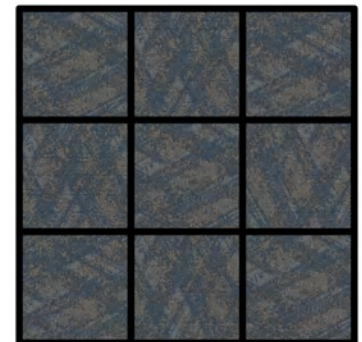

**24" X 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Comfort Inn - Sea Scheme
Corridor Broadloom
CPT-002-SE-ALT1

Product Information

Product Type	Broadloom
Style / Color Number	I372B / Color: 536N
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary Action Bac

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	8
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.244 inches average
Pattern Repeat	72" x 126"
Total Overall Thickness	.384 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Comfort Inn - City Scheme
Corridor Carpet Tile
CPT-002-SE-ALT2**

Product Information

Style / Color Number	I363T / 698N
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method Primary	100 % Solution Dyed Nylon
Backing Secondary	Woven PET
Backing	Ethos with Omnicoat

Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch Tufted	12
Weight	22oz per sq/yd
Finished Pile Thickness	.218 inches
Overall Thickness	.312 inches
Pattern Repeat	N/A
Installation Method	Quarter Turn

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP8320

Warranty 10 Year Limited Warranty



**24" X 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Comfort Inn - Sea Scheme
Lobby Carpet Inset
CPT-003

Product Information

Product Type	Broadloom
Style / Color Number	I368B / Color: 442N
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary Action Bac

Specifications

Size	15'
Gauge	1/10
Stitches per Inch	14
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.225 inches average
Pattern Repeat	90" x 200.02"
Total Overall Thickness	.376 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Comfort Inn - Sea Scheme
Meeting Room
CPT-004-SE-RENO

Product Information

Product Type	Broadloom
Style / Color Number	I368B / Color: 442N
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary Action Bac

Specifications

Size	15'
Gauge	1/10
Stitches per Inch	14
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.225 inches average
Pattern Repeat	90" x 200.02"
Total Overall Thickness	.376 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.


Comfort Inn - Sea Scheme
Back of House / Stairwell Broadloom
CPT-005

Product Information

Product Type	Broadloom
Style / Color Number	I374B / Color: 860N
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	12
Tufted Weight	32oz per sq/yd
Finished Pile Thickness	.200 inches average
Pattern Repeat	24" x 36.01"
Total Overall Thickness	.420 inches average

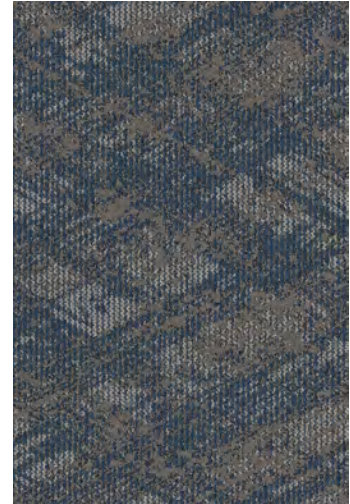

Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.


All Specifications subject to normal manufacturing tolerance.

Comfort Inn - City Scheme Resilient Flooring

Resilient Flooring Product Information

Choice Spec# LVT-001 Guestroom (Optional)

Style Number	Even Plane: EPMIN
Color	Minimal Wood 007 Natural
Product Type	LVT
Size	9.8" W x 39.4" L
Carton Size	32.3 sq ft per carton
Installation Pattern:	Stagger

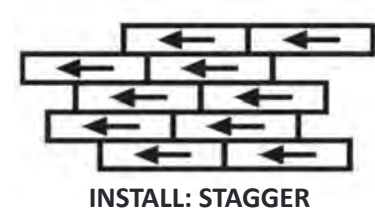

Choice Spec# VCT-001 VCT @ Back of House

Style Number	VCT II
Color	593 Mushroom
Product Type	Vinyl Composition Tile
Size	12" x 12" x 1/8" Thick
Carton Size	45 sq ft per carton (45 tiles/carton)



Comfort Inn - City Scheme

Wall Base Options

Resilient Wall Base Product Information


Choice Spec# RB-001 Resilient Base @ Guestroom

Style Number **MW-32-F**
 Color **32 Pebble**
 Product Type **Reveal - Millwork Wall Base**
 Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
 Carton Size **64 ft per carton**
 Installation **Direct Glue**



Choice Spec# RB-002 Resilient Base @ Corridor

Style Number **MW-TA5-F**
 Color **TA5 Colonial Grey**
 Product Type **Reveal - Millwork Wall Base**
 Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
 Carton Size **64 ft per carton**
 Installation **Direct Glue**




Choice Spec# RB-003 Resilient Base @ Lobby / Breakfast / Flex-Meeting / BOH

Style Number **MW-121-F**
 Color **121 Cement**
 Product Type **Reveal - Millwork Wall Base**
 Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
 Carton Size **64 ft per carton**
 Installation **Direct Glue**



Choice Spec# RB-004 Resilient Base @ Exercise

Style Number **MW-199-F**
 Color **199 Dockside**
 Product Type **Reveal - Millwork Wall Base**
 Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
 Carton Size **64 ft per carton**
 Installation **Direct Glue**



Every step matters

Sustainability

Every Step Matters. Tarkett's holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making. For decades, we've scrutinized every detail of our business for its impact on resources such as soil, water, air, and climate—because when you're trailblazing a more sustainable future, every step matters.

Corporate Transparency is fundamental to our values and the way we do business. Third-party assessments serve as a testament to our performance, earning the trust of customers and partners.



EcoVadis

Tarkett is proud to have been awarded a Platinum sustainability rating by EcoVadis with a score of 81/100, which places us in the top 1% of rated companies. EcoVadis assesses CSR policies, actions, and results across four themes and 21 CSR criteria: environment, labor and human rights, ethics, and sustainable procurement.



Carbon Disclosure Project (CDP)

Tarkett's "A" score for climate change impact positions us at the leadership level of CDP's grading system.



Science Based Targets Initiative

Tarkett's 2030 carbon reduction targets are approved by the Science Based Targets initiative (SBTi). We have two 2030 targets guiding nearly every sustainability initiative at Tarkett:

1. Reduce carbon emissions by 30% across Scopes 1, 2, and 3.
2. Increase recycled content in our products from 18% in 2019 to 30% by 2030.



Start your next project with ReStart®

We're committed to creating a circular economy where nothing goes to waste. Take part by starting your next project with Tarkett's ReStart® flooring take-back and recycling program. The ReStart program will accept any type of flooring from any manufacturer. Join us as we innovate and collaborate towards a healthier future for this generation and generations to come.

Contact Us

Firstname Lastname Title

Goes Here

ChoiceOrders@tarkett.com

800-871-3211

Tarkett Hospitality

285 Kraft Drive

Dalton, GA 30721

800.871.3211

www.tarketthospitality.com

© 2026 Tarkett Hospitality