

# LivSmart Studios by Hilton



Manufacturer: Tarkett Hospitality

Phone: 800.871.3211

Address: 285 Kraft Drive

Contact: [HiltonOrders@tarkett.com](mailto:HiltonOrders@tarkett.com)

Dalton, GA 30721

Web: [www.tarketthospitality.com](http://www.tarketthospitality.com)



## LivSmart Studios - Matcha and Merlot Schemes: Accent Carpet Tile (1) @ Guest Corridor - Light Grey

### Product Information - Hilton Tag# CP-11

Style Number/Color	<b>B0323 c. 882</b>
Product Type	<b>Dynamics Tile</b>
Construction	<b>Multi-level Pattern Cut/Loop</b>
Fiber	<b>Lextron Enviro-Green Nylon</b>
Dye Method	<b>100% Solution Dyed</b>
Primary Backing	<b>Woven Polypropylene</b>
Secondary Backing	<b>Flex-Aire Modular® Cushion</b>

### Specification

Size	<b>24 in. x 24 in.</b>
Gauge	<b>1/10</b>
Stitches per Inch	<b>9</b>
Tufted Weight	<b>22 oz per sq/yd</b>
Total Weight Finished	<b>120 oz</b>
Pile Thickness	<b>.220 in. Approx.</b>
Total Thickness	<b>.376 in. Approx.</b>
Suggested Install	<b>Monolithic</b>

### Performance

Traffic Class	<b>Heavy</b>
(TARR) Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
Flammability	<b>ASTM E 648 Class I</b>
Smoke Density	<b>ASTM E 662 Less than 450</b>
LEED Info	<b>Green Label Plus Certified - GLP8320</b>

**Warranty** **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.  
Recommended for heavy carpet traffic levels.


Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.  
Pattern Streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

### Product Notes

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice. Colors may vary slightly from dye lot to dye lot.
- U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



Install Monolithic

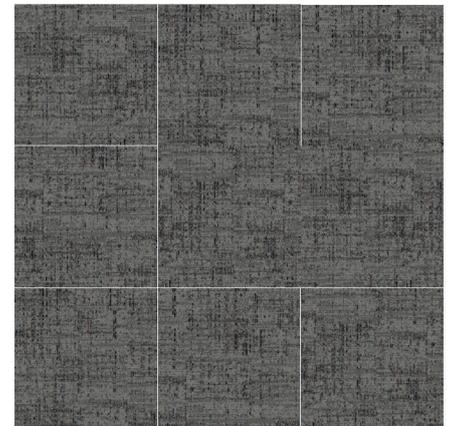

24" X 24 RANDOM CUT TILE



## Accore™

## Product Specification

### 1. PROPRIETARY PRODUCT/MANUFACTURER

- 1.1. **Proprietary Product:** Accore Luxury Vinyl flooring is a rigid core construction engineered from the inside, out—and designed to outperform the extreme demands of today's hospitality environments. Suitable for light commercial hospitality environments such as guest rooms.
- 1.2. **Manufacturer:**  
Tarkett Hospitality Phone: (800)-871-3211  
285 Kraft Dr..  
Dalton, GA 30721  
Web: [www.tarketthospitality.com](http://www.tarketthospitality.com)
- 1.3. **Proprietary Product Description:**
  - 1.3.1. **Construction:** Tarkett Accore is an Ortho-Phthalate-Free, 100% virgin material Rigid Core luxury vinyl constructed with a plastic core and an IXPE acoustical backing.
  - 1.3.2. **Characteristics:**
    - **Edge treatment:** Micro-Bevel
    - **Overall thickness:** 0.197" (5 mm)
    - **Wearlayer Thickness:** .020" (0.51 mm)
    - **Core Thickness:** 0.157" (4 mm)
    - **Accoustical Backing:** 0.039" (1 mm) IXPE
    - **Installation System:** Click-Drop-Lock (I4F)
  - 1.3.3. **Tile/Plank size and Packaging:**
    - **7" x 48" (17.78 cm x 121.92 cm)**  
10 tiles per box, 23.64 ft<sup>2</sup> (2.19 m<sup>2</sup>), 38 lbs. (17.24 kg),  
55 boxes per pallet

### 2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- 2.1. **Rigid Core Polymeric Floor Tile** (ASTM F3261): Class I, Type A or B, Grade 1, Backing Class B
- 2.2. **Dimensional Stability** (ASTM F2199): Passes
- 2.3. **Indentation Recovery** (ASTM F1914): Passes
- 2.4. **Heat Stability** (ASTM F1514):  $\Delta E \leq 8$
- 2.5. **Light Stability** (ASTM F1515):  $\Delta E \leq 8$
- 2.6. **Impact Sound Reduction** (ASTM E2179):  $\Delta IIC \geq 20$ dB
- 2.7. **IIC Impact Sound Reduction Rating** (ASTM E492): 68 (tested with 6" concrete slab with drop ceiling)
- 2.8. **Chemical Resistance** (ASTM F925): Passes
- 2.9. **VOC Requirements** (ASTM D5116):  $< 0.1$  mg/m<sup>3</sup>

### 3. INSTALLATION

See Accore installation instructions for complete details.  
Floating installations do not require any adhesives.  
For Glue Down installations, see below:

#### 3.1. Adhesives:

- **Tarkett C-GU High Moisture Adhesive**  
Porous & Non-Porous Substrates: 125-150 sq. ft. per gallon

### 4. AVAILABILITY AND COST

Available direct through Tarkett retailers nationwide.

### 5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Even Plane Maintenance Instructions for complete maintenance details.

### 6. TECHNICAL SERVICES

Visit us on the web at [www.tarketthospitality.com](http://www.tarketthospitality.com)

Contact Technical support at (800) -871-3211

### 7. WARRANTY

Limited 15-year Light Commercial warranty. For complete details, contact Tarkett or an authorized Tarkett retailer.



## Accore™

## Product Specification

### 1. PROPRIETARY PRODUCT/MANUFACTURER

1.1. **Proprietary Product:** Accore Luxury Vinyl flooring is a rigid core construction engineered from the inside, out—and designed to outperform the extreme demands of today's hospitality environments. Suitable for light commercial hospitality environments such as guest rooms.

1.2. **Manufacturer:**

Tarkett Hospitality Phone: (800)-871-3211  
285 Kraft Dr..  
Dalton, GA 30721  
Web: [www.tarketthospitality.com](http://www.tarketthospitality.com)

1.3. **Proprietary Product Description:**

1.3.1. **Construction:** Tarkett Accore is an Ortho-Phthalate-Free, 100% virgin material Rigid Core luxury vinyl constructed with a plastic core and an IXPE acoustical backing.

1.3.2. **Characteristics:**

- **Edge treatment:** Micro-Bevel
- **Overall thickness:** 0.197" (5 mm)
- **Wearlayer Thickness:** .020" (0.51 mm)
- **Core Thickness:** 0.157" (4 mm)
- **Accoustical Backing:** 0.039" (1 mm) IXPE
- **Installation System:** Click-Drop-Lock (I4F)

1.3.3. **Tile/Plank size and Packaging:**

- **7" x 48" (17.78 cm x 121.92 cm)**  
10 tiles per box, 23.64 ft<sup>2</sup> (2.19 m<sup>2</sup>), 38 lbs. (17.24 kg),  
55 boxes per pallet

### 2. PRODUCT PERFORMANCE AND TECHNICAL DATA

- 2.1. **Rigid Core Polymeric Floor Tile (ASTM F3261):** Class I, Type A or B, Grade 1, Backing Class B
- 2.2. **Dimensional Stability (ASTM F2199):** Passes
- 2.3. **Indentation Recovery (ASTM F1914):** Passes
- 2.4. **Heat Stability (ASTM F1514):**  $\Delta E \leq 8$
- 2.5. **Light Stability (ASTM F1515):**  $\Delta E \leq 8$
- 2.6. **Impact Sound Reduction (ASTM E2179):**  $\Delta IIC \geq 20$ dB
- 2.7. **IIC Impact Sound Reduction Rating (ASTM E492):** 68 (tested with 6" concrete slab with drop ceiling)
- 2.8. **Chemical Resistance (ASTM F925):** Passes
- 2.9. **VOC Requirements (ASTM D5116):** < 0.1 mg/m<sup>3</sup>

### 3. INSTALLATION

See Accore installation instructions for complete details.

Floating installations do not require any adhesives.

For Glue Down installations, see below:

3.1. **Adhesives:**

- **Tarkett C-GU High Moisture Adhesive**

Porous & Non-Porous Substrates: 125-150 sq. ft. per gallon

### 4. AVAILABILITY AND COST

Available direct through Tarkett retailers nationwide.

### 5. MAINTENANCE

72 hours after installation is completed, initial maintenance procedures must be implemented in accordance with manufacturer's requirements. Refer to Even Plane Maintenance Instructions for complete maintenance details.

### 6. TECHNICAL SERVICES

Visit us on the web at [www.tarketthospitality.com](http://www.tarketthospitality.com)

Contact Technical support at (800) -871-3211

### 7. WARRANTY


Limited 15-year Light Commercial warranty. For complete details, contact Tarkett or an authorized Tarkett retailer.



## LivSmart Studios - Matcha and Merlot Schemes: Carpet Base @ Guest Corridors

### Product Information - Hilton Tag# B-10

Style Number/Color	<b>728S c. 8504</b>
Product Type	<b>Carpet Cove Base</b>
Construction	<b>CPG - Cut Pile Graphics</b>
Fiber	<b>100% C.F. Lextron Enviro-Green Nylon</b>
Dye Method	<b>Solution Dyed</b>
Primary Backing	<b>Woven Polypropylene</b>
Secondary Backing	<b>Action Bac</b>

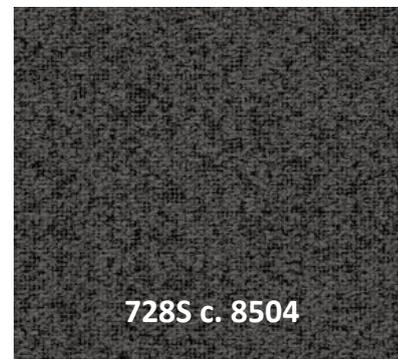

### Specification

Gauge	<b>1/10</b>
Stitches per Inch	<b>9</b>
Tufted Weight	<b>26 oz per sq/yd</b>
Total Weight Finished	<b>64 oz</b>
Pile Thickness	<b>.250 in. Approx.</b>
Width	<b>12 ft</b>
Suggested Install	<b>Adhesive per Manufacturer's Recommendation</b>

### Performance

Traffic Class	<b>Recommended for Cove Base only</b>
Radiant Panel	<b>Class I</b>
Smoke Density	<b>ASTM E 662 Less than 450</b>
Pattern Repeat	<b>.25 in. W x .25 in. L</b>

<b>Warranty</b>	<b>10 Year Wear Guarantee</b>
-----------------	-------------------------------

Enviro-Green yarn has 10% pre-consumer recycled content.  
Recommended for heavy carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

#### Product Notes

- 1 Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.  
Colors may vary slightly from dye lot to dye lot.
- 2 U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 3 Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

## LivSmart Studios - Matcha and Merlot Schemes: Broadloom Carpet @ Stairwell

### Product Information - Hilton Tag# CP-13

Style Number/Color	<b>B0312 / c. 982</b>
Product Type	<b>Dynamics Broadloom</b>
Construction	<b>Multi-Level Pattern Cut/Loop</b>
Fiber	<b>CF Lextron Enviro-Green Nylon</b>
Dye Method	<b>100 % Solution Dyed</b>
Primary Backing	<b>Woven Polypropylene</b>
Secondary Backing	<b>Actionbac</b>

### Specifications

Size	<b>12 ft. Width</b>
Gauge	<b>1/10</b>
Stitches per Inch	<b>10</b>
Tufted Weight	<b>32 oz per sq/yd</b>
Total Weight Finished	<b>68 oz</b>
Pile Thickness	<b>.312 in.</b>
Total Thickness	<b>.375 in. Approx.</b>
Pattern Repeat	<b>72 in. W x 96 in. L</b>

### Performance

Traffic Class (TARR)	<b>Moderate</b>
Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
Flammability	<b>ASTM E 648 Class I</b>
Smoke Density	<b>ASTM E 662 Less than 450</b>
LEED Info	<b>Green Label Plus Certified - GLP2380</b>

### Warranty


**10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.  
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.  
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.  
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

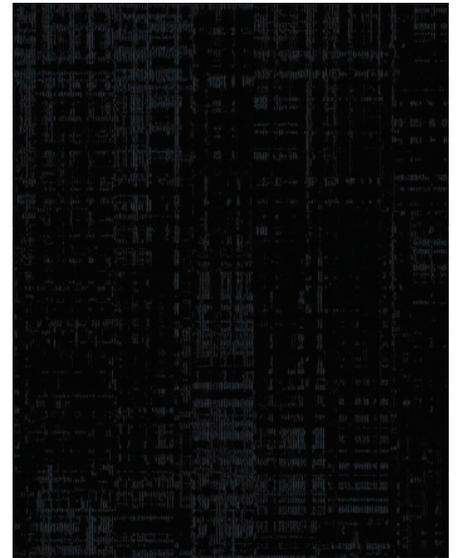

## LivSmart Studios - Matcha and Merlot Schemes: Resilient Wall Base

### Product Information: Resilient Wall Base

#### Hilton Tag# B-01 (A)(B) - Resilient Base @ Guestroom & Bath

Style Number            MW-31-F  
Color                      31 Zephyr  
Product Type            Millwork Wall Base - Reveal  
Size                        Profile  
Carton Size              4.25" x .25 Thick x 8' L  
                                 64 LF per Carton



31 Zephyr CB



#### Hilton Tag # B-10ALT (A)(B) - Resilient Base @ Guest Corridors

Style Number            MW-32-F  
Color                      32 Pebble  
Product Type            Millwork Wall Base - Reveal Profile  
Size                        4.25" x .25 Thick x 8' L  
Carton Size              64 LF per Carton



32 Pebble WG



#### Hilton Tag #B-11 (A)(B) - Resilient Base @ Public Areas & BOH

Style Number            MW-63-F  
Color                      63 Burnt Umber  
Product Type            Millwork Wall Base - Reveal Profile  
Size                        4.25" x .25 Thick x 8' L  
Carton Size              64 LF per Carton



63 Burnt Umber B



### Product Information: Vinyl Composition Tile

#### Hilton Tag #RF-12 (A)(B) - Vinyl Composition Tile @ BOH

Style Number            VCT II  
Color                      873 Daylight  
Product Type            Vinyl Composition Tile  
Size                        24" x 24"  
Carton Size              45 sq/ft per carton



### Product Information - Static Dissipative Tile

#### Hilton Tag #RF-11 (A)(B) - Static Dissipative Tile @ PBX

Style Number            IQGRA  
Color                      0950 Black Grey  
Product Type            Static Dissipative Tile  
Size                        24" x 24"  
Carton Size              14 pcs per carton

