



Spritz Scheme

 **Hilton**
Garden Inn™

© **Tarkett** Hospitality


Hilton Garden Inn - (A) Spritz Scheme

Guestroom Broadloom

CP-01

Product Information

Product Type	Broadloom
Style / Color Number	HG31B / 348
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac

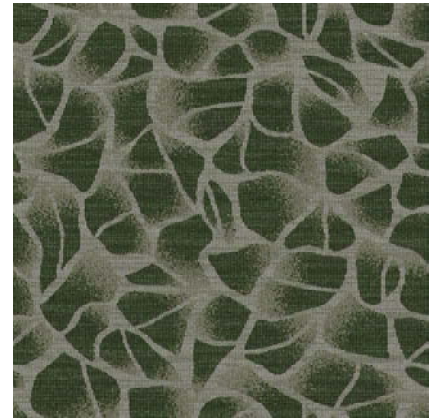

Specifications

Size	13'
Gauge	1/10
Stitches per Inch	9
Tufted Weight	32oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	78" x 78"
Total Overall Thickness	.352 inches average



Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Enviro-Green yarn has 10% pre-consumer recycled content. 

Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Guestroom Carpet Tile

CP-01.ALT

Product Information

Product Type	Carpet Tile
Style / Color Number	HG33T / 348
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Flex Aire


Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	22oz per sq/yd
Total Weight	19 oz
Finished Pile Thickness	.230 inches average
Pattern Repeat	N/A
Installation Method	Quarter Turn

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

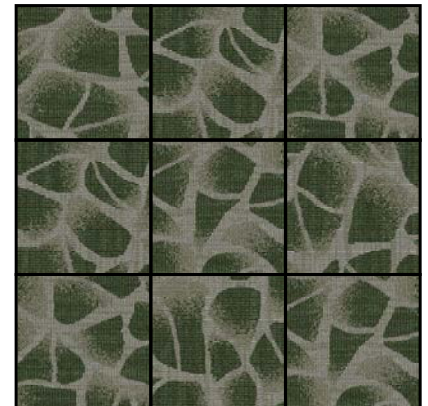

**24"x 24" RANDOM CUT INSTALL
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Corridor Broadloom

CP-10

1 repeat shown- not to scale

Product Information

Style / Color Number	HG35B / 314
Product Type	Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	72" x 156"
Total Overall Thickness	.434 inches average

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty



Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme
Corridor Carpet Tile
CP-10.ALT

Product Information

Style / Color Number	HG37T / 314
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Flex Aire


Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	28 oz per sq/yd
Total Weight	125 oz
Finished Pile Thickness	.250 inches average
Pattern Repeat	N/A
Installation Method	Vertical Ashlar

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

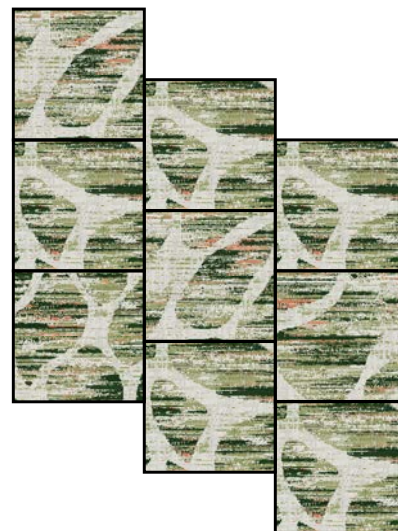

**24" x 24" RANDOM CUT INSTALL
 VERTICAL ASHLAR INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content. 
Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme
Elevator Lobby Broadloom
CP-11

Product Information

Style / Color Number	HG39B / 314
Product Type	Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	72" x 73.60"
Total Overall Thickness	.434 inches average



Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Enviro-Green yarn has 10% pre-consumer recycled content. 

Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
 IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Elevator Lobby Carpet Tile

CP-11.ALT

Product Information

Style Number	HG41T - 314
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Flex Aire

Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	28 oz per sq/yd
Total Weight	125 oz
Finished Pile Thickness	.250 inches average
Pattern Repeat	N/A
Installation Method	Vertical Ashlar

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty 10 Year Limited Warranty



**24" x 24" RANDOM CUT TILE
VERTICAL ASHLAR INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - Spritz Scheme

Meeting Room Broadloom

CP-12

Product Information

Style / Color Number	HG43B / 314
Product Type	Broadloom
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	144" x 176"
Total Overall Thickness	.434 inches average

1 repeat shown- not to scale



Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. 

Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Meeting Room Carpet Tile

CP-12.ALT

Product Information

Style / Color Number	HG45T / 314
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Flex Aire

Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	28 oz per sq/yd
Total Weight	125 oz
Finished Pile Thickness	.250 inches average
Pattern Repeat	N/A
Installation Method	Vertical Ashlar

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty	10 Year Limited Warranty
-----------------	---------------------------------



**24" x 24" RANDOM CUT TILE
VERTICAL ASHLAR INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Hilton Garden Inn - (A) Spritz Scheme
BOH & Stairwell Broadloom
CP-13**


1 repeat shown- not to scale

Product Information

Style / Color Number	HG47B / 380
Product Type	Broadloom
Construction	Multi-Level Pattern Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	16oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	36" x 36"
Total Overall Thickness	.352 inches average

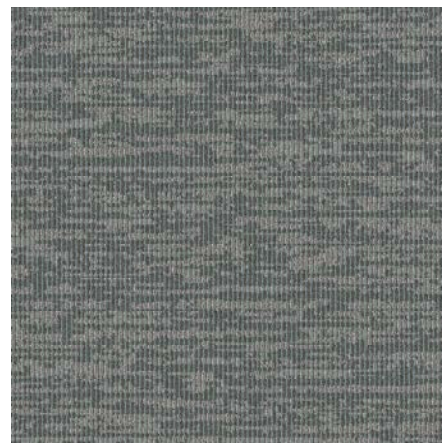

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content. 
Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

BOH & Stairwell Carpet Tile

CP-13.ALT

Product Information

Style / Color Number	HG49T / 600
Product Type	Carpet Tile
Construction	Multi-Level Pattern Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Flex Aire


Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	15oz per sq/yd
Total Weight	105 oz
Finished Pile Thickness	.230 inches average
Pattern Repeat	N/A
Installation Method	Quarter Turn

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
Electrostatic Propensity	Less Than 3.5kv
LEED Info	Green Label Plus Certified – GLP8320

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

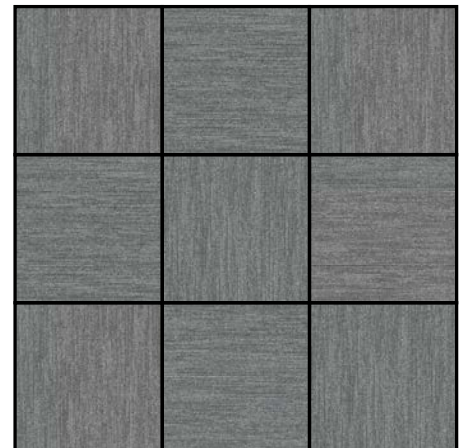

**24" x 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme
Lobby Area Rug
PA-900

Product Information

Style / Color Number	HG51R / 314
Product Type	Lobby - Area Rug
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Non-Skid

Specifications

Size	13'6" Circle
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	162" x 162.40"
Total Overall Thickness	.434 inches average
Edge Treatment	Binding Color - 605

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Cut pattern area varies per rug



Rugs must be cut from center of the design.

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Dining Area Rug

PA-901

Cut pattern area varies per rug

Product Information

Style / Color Number	HG53R / 314
Product Type	Dining - Area Rug
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Non-Skid



Rugs must be cut from center of the design.

Specifications

Rug Size	13'0" x 20'10"
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	162" x 74"
Total Overall Thickness	.434 inches average
Edge Treatment	Binding Color - 485

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Prefunction Area Rug

PA-902

Product Information

Style / Color Number	HG55R / 314
Product Type	Prefunction - Area Rug
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Non-Skid

Specifications

Rug Size	10'6" x 12'0"
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	162" x 74"
Total Overall Thickness	.434 inches average
Edge Treatment	Binding Color - 485

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Cut pattern area varies per rug



Rugs must be cut from center of the design.

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme

Lobby Area - Renovation Only

CP-50


1 repeat shown- not to scale

Product Information

Style / Color Number	HG57R / 314
Product Type	Lobby Area - Renovations Broadloom/Rug
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	144" x 162.40"
Total Overall Thickness	.434 inches average
Edge Treatment	Binding Color - 605 (when used as a bound area rug)

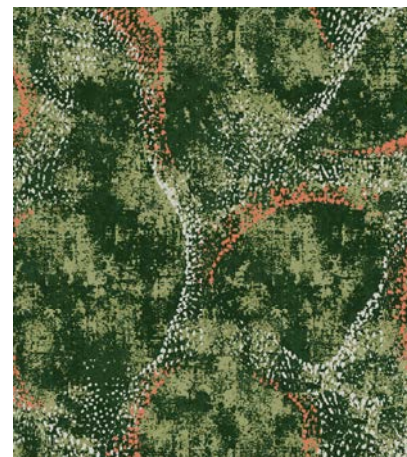

Rugs must be cut from center of the design.

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. 
Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Hilton Garden Inn - (A) Spritz Scheme
Dining Area - Renovation Only
CP-51

Product Information

Product Type	Dining Area - Renovations Broadloom/Rug
Style / Color Number	HG59R / 314
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

1 repeat shown- not to scale



Rugs must be cut from the center of the design.

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.247 inches average
Pattern Repeat	144" x 74"
Total Overall Thickness	.434 inches average
Edge Treatment	Binding Color - 485 (when used as a bound area rug)

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.


IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Hilton Garden Inn - (B) Spritz Scheme
Resilient Flooring**

Resilient Flooring Product Information

Hilton Tag#	RF-01 ERT @ Guestroom (Optional) RF-11 ERT @ BOH
Style Number	ACCRE-0016-7X48-VT
Color	Fumed Hickory 0016
Product Type	LVT/ERT - Enhanced Resilient Tile
Size	7" W x 48" L
Carton Size	23.64 sq ft per carton
Installation Pattern:	Stagger

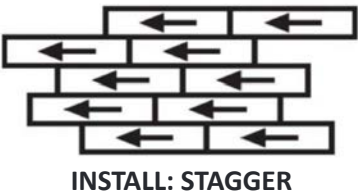

Hilton Tag# (B) VCT-10 VCT @ Public Area	
Style Number	VCT II
Color	326 Dunes
Product Type	Vinyl Composition Tile
Size	12" x 12" x 1/8" Thick
Carton Size	45 sq ft per carton (45 tiles/carton)




Hilton Garden Inn - (A) Spritz Scheme Wall Base Options

Resilient Wall Base Product Information


Hilton Tag# **B-01 Resilient Base @ Guestroom**
B-10 Resilient Base @ Corridor

Style Number **MW-20-F**
Color **20 Charcoal**
Product Type **Reveal - Millwork Wall Base**
Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
Carton Size **64 ft per carton**
Installation **Direct Glue**

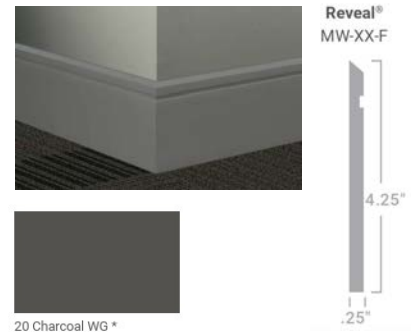

Hilton Tag# **B-11 Resilient Base @ Fitness Area**

Style Number **MW-48-F**
Color **48 Grey**
Product Type **Reveal - Millwork Wall Base**
Size **4"-1/4"H x .250" Thick x 8 ft. Lengths**
Carton Size **64 ft per carton**
Installation **Direct Glue**

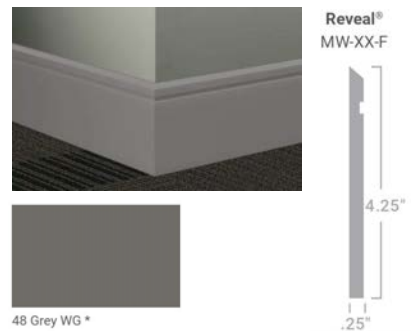

Carpet Base Product Information

Hilton Tag# **B-01.ALT Carpet Base @ Guestroom**
B-10.ALT Carpet Base @ Corridor

Style Number **728S**
Color **X482**
Product Type **Cut pile bound carpet base**
Size **4"H x 12' Strips**
Carton Size **N/A**
Installation **Direct Glue**



Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.









NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.


Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

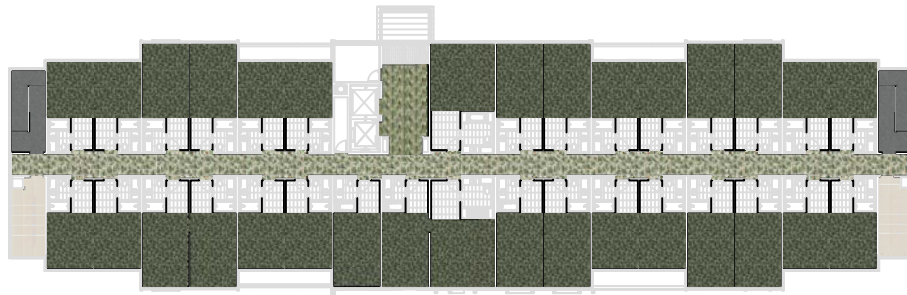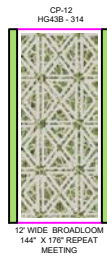

2ND - 6TH FLOOR PLAN
& TYPICAL FLOORS

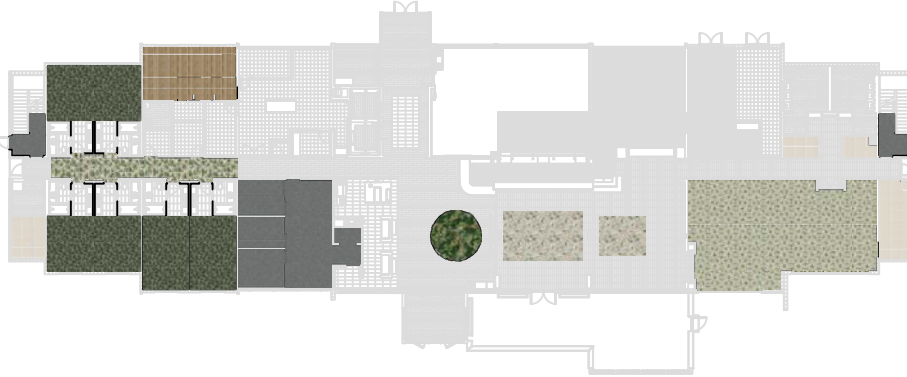

1ST FLOOR PLAN

GENERAL NOTES

- 1) This drawing and designs contained therein are the sole property of Tarkett Hospitality Carpet Mills, Inc.
- 2) The red dotted lines indicate known seams. Due to roll sizes and unexpected conditions that may arise, adjustment seams may become necessary during installation. Locations of cross seams are approximate. Actual layout may vary based on roll sizes.
- 3) All contractors using this drawing will be responsible for verifying all dimensions and yardage requirements. Tarkett Hospitality Carpet Mills, Inc. will not be held responsible for final yardage requirements.
- 4) These drawings are used to show the interior design intent only and should not be used for construction purposes.
- 5) Patterned Products require experienced and knowledgeable installation technicians. Please ensure that installers have proper equipment and are familiar with/observe Tarkett's Installation Guidelines. Please contact Technical Services for questions to request a copy of the Installation Guidelines.
Doye Slaughter @ (706) 561-3354
John Cox @ (706) 260-3054

Seam Lines are indicated by red dashed lines.
This plan must be field verified for measurement accuracy.






Rev. #	Description	Date

Approved By: _____
Date: _____




TARKETT HOSPITALITY
285 KRAFT DRIVE
DALTON, GA. 30721
(800) 871-3211

Project Name and Address
HILTON GARDEN INN
SPRITZ PROTOTYPE
BROADLOOM





2ND - 5TH FLOOR PLAN
2 TYPICAL FLOORS



RESILIENT WALL BASE WITH CARPET BASE OPTION
If B-01 ALT carpet base is used in guestrooms it is to be used in carpeted areas only. B-01 to be used in entries.

Floor	Room Type	Product
3217 FLOOR	GUESTROOM ENTRIES	B-01 4.25\"
775 FLOOR	PUBLIC SPACES	B-10 4.25\"
1647 FLOOR	GUESTROOMS	B-01 ALT 4\"
1511 FLOOR	PUBLIC SPACES	B-10 4.25\"
827 FLOOR	PUBLIC SPACES	B-10 ALT 4\"

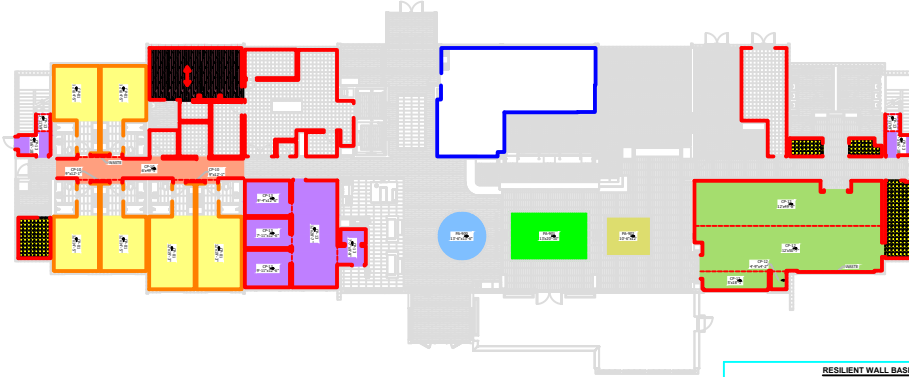

RESILIENT WALL BASE WITH CARPET BASE OPTION
If B-01 ALT & B10 ALT carpet bases are used in guestrooms & public spaces they are to be used in carpeted areas only. B-01 & B-10 to be used at hard surfaces.

Floor	Room Type	Product
105 FLOOR	GUESTROOM ENTRIES	B-01 4.25\"
301 FLOOR	GUESTROOMS	B-01 ALT 4\"
576 FLOOR	PUBLIC SPACES	B-10 4.25\"
518 FLOOR	PUBLIC SPACES	B-10 ALT 4\"

GENERAL NOTES

- 1) This drawing and designs contained therein are the sole property of Tarkett Hospitality Carpet Mills, Inc.
- 2) The red dotted lines indicate known seams. Due to roll sizes and unexpected conditions that may arise, adjustment seams may become necessary during installation. Locations of cross seams are approximate. Actual layout may vary based on roll sizes.
- 3) All contractors using this drawing will be responsible for verifying all dimensions and yardage requirements. Tarkett Hospitality Carpet Mills, Inc. will not be held responsible for final yardage requirements.
- 4) These drawings are used to show the interior design intent only and should not be used for construction purposes.
- 5) Patterned Products require experienced and knowledgeable installation technicians. Please ensure that installers have proper equipment and are familiar with Tarkett's Installation Guidelines. Please contact Technical Services for questions to request a copy of the Installation Guidelines.
Doye Slaughter @ (706) 561-3354
John Cox @ (706) 260-3054

Seam Lines are indicated by red dashed lines.
This plan must be field verified for measurement accuracy.

Rev. #	Description	Date


Approved By:
Date:



TARKETT HOSPITALITY
285 KRAFT DRIVE
DALTON, GA. 30721
(800) 871-3211

Project Name and Address

HILTON GARDEN INN
SPRITZ PROTOTYPE
BROADLOOM



CP-01 ALT
HG33T - 348
CARPET TILE
24" X 24" (GT)
GUESTROOMS




CP-10 ALT
HG37T - 314
CARPET TILE
24" X 24" (VA)
CORRIDORS



CP-11 ALT
HG41T - 314
CARPET TILE
24" X 24" (VA)
ELEVATOR LOBBIES



CP-12 ALT
HG45T - 314
CARPET TILE
24" X 24" (VA)
MEETING




CP-13 ALT
HG49T - 800
CARPET TILE
24" X 24" (GT)
BOH




CP-13
HG47B - 380
CARPET TILE
24" X 24" (GT)
BOH



CP-50
HG5TR - 314
13'-6" DIAMETER LOOSE LAY RUG
LOBBY RUG




PA-800
HG5SR - 314
13'-6" WIDE X 20'-10" LOOSE LAY RUG
DINING RUG




PA-801
HG5SR - 314
13'-6" WIDE X 20'-10" LOOSE LAY RUG
DINING RUG





PA-802
HG5SR - 314
10'-6" WIDE X 12'-0" LOOSE LAY RUG
PREFUNCTION RUG




RE-11
ACCORE
FUMED HICKORY
LUXURY VINYL TILE
7" X 48"
BOH



VCT-11
VCT II
328 DUNES
VCT TILE
12" X 12"
STORAGE ROOM

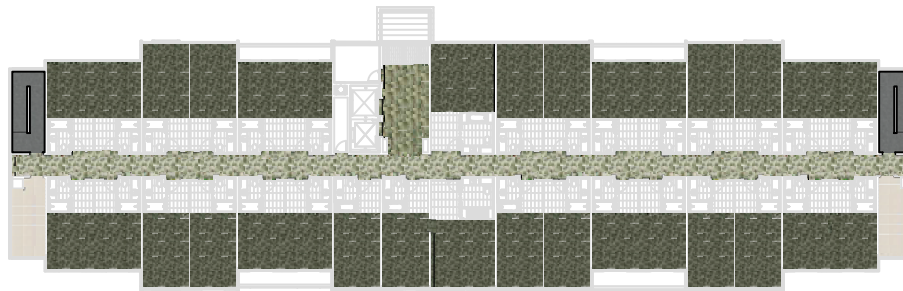

2ND - 5TH FLOOR PLAN
2 TYPICAL FLOORS

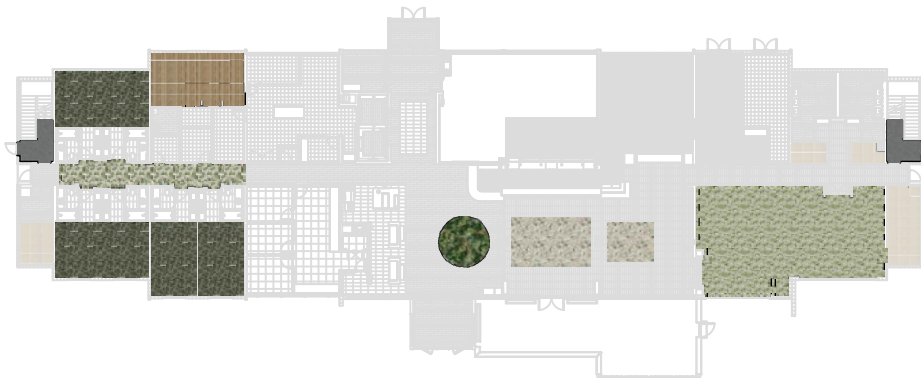

1ST FLOOR PLAN

GENERAL NOTES

- 1) This drawing and designs contained therein are the sole property of Tarkett Hospitality Carpet Mills, Inc.
- 2) The red dotted lines indicate known seams. Due to roll sizes and unexpected conditions that may arise, adjustment seams may become necessary during installation. Locations of cross seams are approximate. Actual layout may vary based on roll sizes.
- 3) All contractors using this drawing will be responsible for verifying all dimensions and yardage requirements. Tarkett Hospitality Carpet Mills, Inc. will not be held responsible for final yardage requirements.
- 4) These drawings are used to show the interior design intent only and should not be used for construction purposes.
- 5) Patterned Products require experienced and knowledgeable installation technicians. Please ensure that installers have proper equipment and are familiar with Tarkett's Installation Guidelines. Please contact Technical Services for questions to request a copy of the Installation Guidelines.
Doye Slaughter @ (706) 561-3554
John Cox @ (706) 260-3054

Seam Lines are indicated by red dashed lines.
This plan must be field verified for measurement accuracy.

Rev. #	Description	Date


Approved By:
Date:



TARKETT HOSPITALITY
285 KRAFT DRIVE
DALTON, GA. 30721
(800) 871-3211

Project Name and Address

HILTON GARDEN INN
SPRITZ PROTOTYPE
CARPET TILE



CP-01 ALT
HG33T - 348
CARPET TILE
24" X 24" (QT)
GUESTROOMS




CP-10 ALT
HG37T - 314
CARPET TILE
24" X 24" (VA)
CORRIDORS



CP-11 ALT
HG41T - 314
CARPET TILE
24" X 24" (VA)
ELEVATOR LOBBIES



CP-12 ALT
HG45T - 314
CARPET TILE
24" X 24" (VA)
MEETING



CP-13 ALT
HG49T - 800
CARPET TILE
24" X 24" (QT)
BOH



PA-000
HG51R - 314
13'-6" DIAMETER LOOSE LAY RUG
LOBBY RUG



PA-801
HG53R - 314
13'-0" WIDE X 20'-10" LOOSE LAY RUG
DINING RUG




PA-802
HG55R - 314
10'-0" WIDE X 12'-0" LOOSE LAY RUG
PREFUNCTION RUG




RF-01
ACCORE
FUMED HICKORY
LUXURY VINYL TILE
7" X 48"
GUESTROOM (OPTION)



RF-11
ACCORE
FUMED HICKORY
LUXURY VINYL TILE
7" X 48"
BOH



VCT-11
VCT II
328 DUNES
VCT TILE
12" X 12"
STORAGE ROOM




CP-13
HG47B - 380
12" WIDE BROADLOOM
30" X 30" REPEAT
STAIRS




CP-50
HG57R - 314
12" WIDE BROADLOOM
144" X 162.45" REPEAT
LOBBY (RENOVATION)




CP-51
HG59R - 314
12" WIDE BROADLOOM
144" X 144" REPEAT
DINING & PREFUNCTION (RENOVATION)





B-01
MW-20-F CHARCOAL
4.25" VINYL BASE
GUESTROOMS






B-10
MW-20-F CHARCOAL
4.25" VINYL BASE
PUBLIC SPACES





B-11
MW-48-F GREY
4.25" VINYL BASE
FITNESS

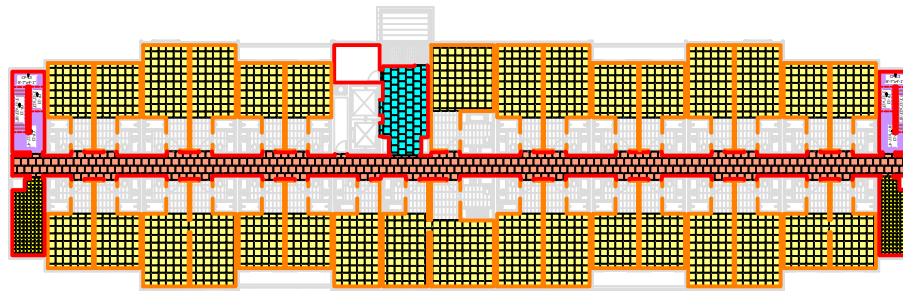

2ND - 5TH FLOOR PLAN
TYPICAL FLOORS

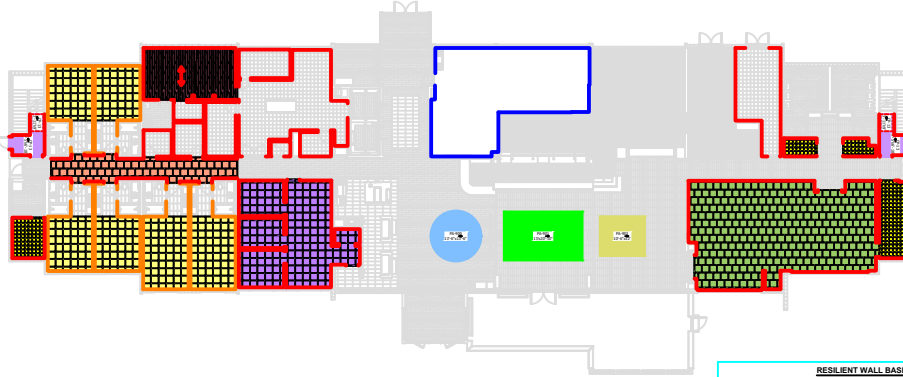

1ST FLOOR PLAN



GENERAL NOTES

- 1) This drawing and designs contained herein are the sole property of Tarkett Hospitality Carpet Mills, Inc.
- 2) The red dotted lines indicate known seams. Due to roll sizes and unexpected conditions that may arise, adjustment seams may become necessary during installation. Locations of cross seams are approximate. Actual layout may vary based on roll sizes.
- 3) All contractors using this drawing will be responsible for verifying all dimensions and yardage requirements. Tarkett Hospitality Carpet Mills, Inc. will not be held responsible for final yardage requirements.
- 4) These drawings are used to show the interior design intent only and should not be used for construction purposes.
- 5) Patterned Products require experienced and knowledgeable installation technicians. Please ensure that installers have proper equipment and are familiar with Tarkett's Installation Guidelines. Please contact Technical Services for questions to request a copy of the Installation Guidelines.
Doye Slaughter @ (706) 561-3554
John Cox @ (706) 260-3054

Seam Lines are indicated by red dashed lines.
This plan must be field verified for measurement accuracy.

Rev. #	Description	Date

Approved By:
Date:



TARKETT HOSPITALITY
285 KRAFT DRIVE
DALTON, GA. 30721
(800) 871-3211

Project Name and Address

HILTON GARDEN INN
SPRITZ PROTOTYPE
CARPET TILE

Every step matters

Sustainability

Every Step Matters. Tarkett's holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making. For decades, we've scrutinized every detail of our business for its impact on resources such as soil, water, air, and climate—because when you're trailblazing a more sustainable future, every step matters.

Corporate Transparency is fundamental to our values and the way we do business. Third-party assessments serve as a testament to our performance, earning the trust of customers and partners.



EcoVadis

Tarkett is proud to have been awarded a Platinum sustainability rating by EcoVadis with a score of 81/100, which places us in the top 1% of rated companies. EcoVadis assesses CSR policies, actions, and results across four themes and 21 CSR criteria: environment, labor and human rights, ethics, and sustainable procurement.



Carbon Disclosure Project (CDP)

Tarkett's "A" score for climate change impact positions us at the leadership level of CDP's grading system.



Science Based Targets Initiative

Tarkett's 2030 carbon reduction targets are approved by the Science Based Targets initiative (SBTi). We have two 2030 targets guiding nearly every sustainability initiative at Tarkett:

1. Reduce carbon emissions by 30% across Scopes 1, 2, and 3.
2. Increase recycled content in our products from 18% in 2019 to 30% by 2030.



Start your next project with ReStart®

We're committed to creating a circular economy where nothing goes to waste. Take part by starting your next project with Tarkett's ReStart® flooring take-back and recycling program. The ReStart program will accept any type of flooring from any manufacturer. Join us as we innovate and collaborate towards a healthier future for this generation and generations to come.

Contact Us

Firstname Lastname

Title Goes Here

HiltonOrders@tarkett.com

800-871-3211

Tarkett Hospitality

285 Kraft Drive
Dalton, GA 30721
800.871.3211

www.tarketthospitality.com

© 2026 Tarkett Hospitality