



Style: \$0938 / Color: 168

Repeat: 36 W X 36 L

Weight: 32oz Width: 12 ft

Type: Multi-Level Cut / Loop



**Control Number: CPT-001C** 

**Area: ROOMS TWILIGHT** 





## SLEEP INN PROTO STYLE: S0938 COLOR: 168 ROOMS TWILIGHT

Product Type Broadloom
Style/Color Number S0938 / 168

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Actionbac

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 10

Tufted Weight
Total Weight
Finished Pile Thickness
Pattern Repeat

32 oz per sq/yd
68 oz per sq/yd
.252 in. (Approx.)
36 in. W x36 in. L

## Performance

Traffic Class (TARR) Moderate
Pill Test Pass
Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

Style: \$0940 / Color: 614

Repeat: 36 W X 36 L

Weight: 32 oz. Width: 12 ft

Type: Multi-Level Cut / Loop



Control Number: CPT-001A

Area: ROOMS DUSK





## SLEEP INN PROTO STYLE: S0940 COLOR: 614 ROOMS DUSK

Product Type Broadloom
Style/Color Number S0940 / 614

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Actionbac

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 10

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

32 oz per sq/yd
68 oz per sq yd
.252 in. (Approx.)
36 in. W x36 in. L

## **Performance**

Traffic Class Moderate
(TARR) Pill Test Pass
Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

Style: S0942 / Color: 124

Repeat: 36 W X 36 L


Weight: 36 oz. Width: 12 ft

Type: Multi-Level Cut / Loop



**Control Number: CPT-001D** 

**Area: ROOMS DAWN** 

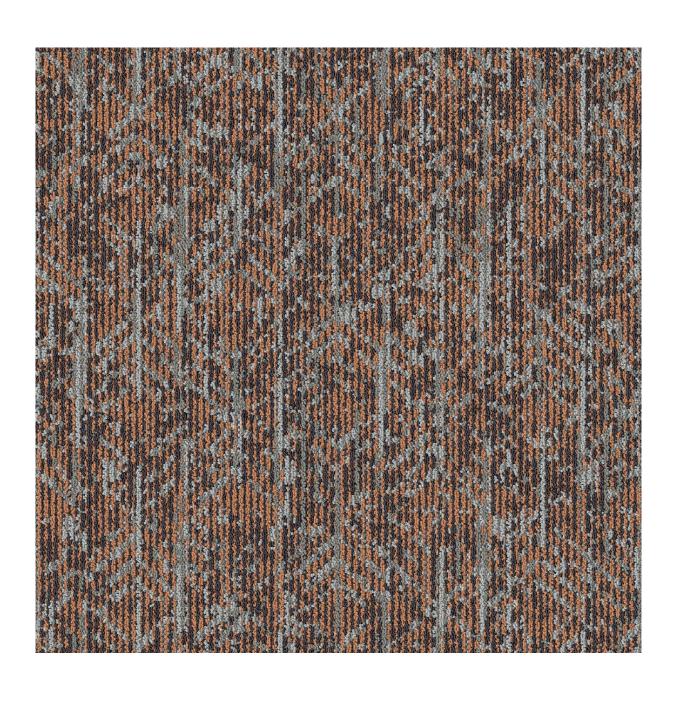



## SLEEP INN PROTO STYLE: S0942 COLOR: 124 ROOMS DAWN

Product Type Broadloom
Style/Color Number S0942 / 124

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Actionbac

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 10

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

32 oz per sq/yd
68 oz per sq/yd
.252 in. (Approx.)
36 in. W x 36 in. L

## **Performance**

Traffic Class (TARR) Moderate
Pill Test Pass
Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

Style: S0944 / Color: 661 Repeat: 36 W X 36 L


Weight: 36 oz. Width: 12 ft

Type: Multi-Level Cut / Loop



**Control Number: CPT-001B** 

**Area: ROOMS STARRY NIGHT** 

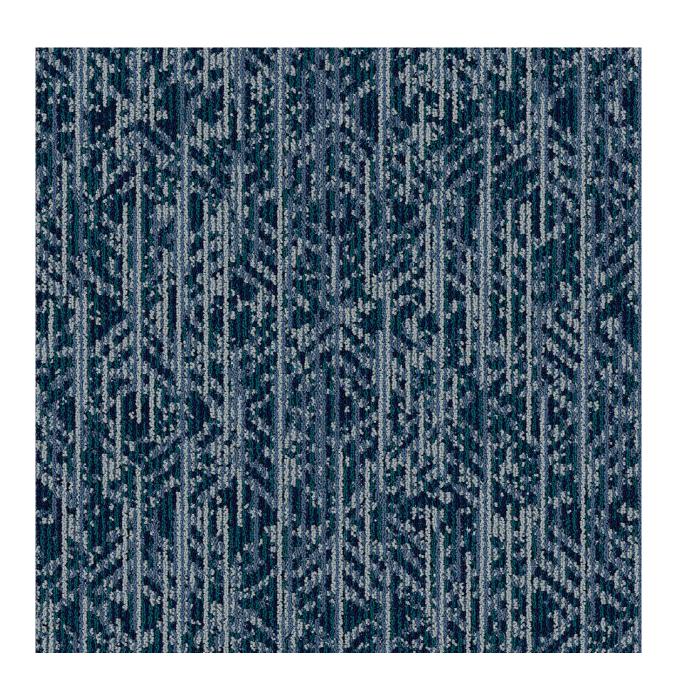



## SLEEP INN PROTO STYLE: S0944 COLOR: 661 ROOMS STARRY NIGHT

Product Type Broadloom
Style/Color Number S0944 / 661

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Actionbac

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 10

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

32 oz per sq/yd
68 oz per sq/yd
.252 in. (Approx.)
36 in. W x 36 in. L

#### Performance

Traffic Class Moderate
(TARR) Pill Test Pass
Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- 1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



Style: S0946 / Color: 286 Repeat: 72 W X 72.01 L

Weight: 36 oz. Width: 12 ft

Type: Multi-Level Cut / Loop

**Control Number: CPT-10A** 

**Area: CORRIDOR DUSK & STARRY NIGHT** 







## SLEEP INN PROTO STYLE: S0946 COLOR: 286 CORRIDOR

Product Type Broadloom
Style/Color Number S0946 / 286

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Unitary

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 12

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

36 oz per sq/yd
72 oz per sq/yd
.252 in. (Approx.)
72 in. W x 72.01 in. L

## **Performance**

Traffic Class Heavy (TARR) Pill Test Pass Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- 1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



**Control Number: CPT-10B** 


Area: CORRIDOR DAWN & TWILIGHT

Style: S0948 / Color: 284 Repeat: 72 W X 72.01 L

Weight: 36 oz. Width: 12 ft

Type: Multi-Level Cut / Loop



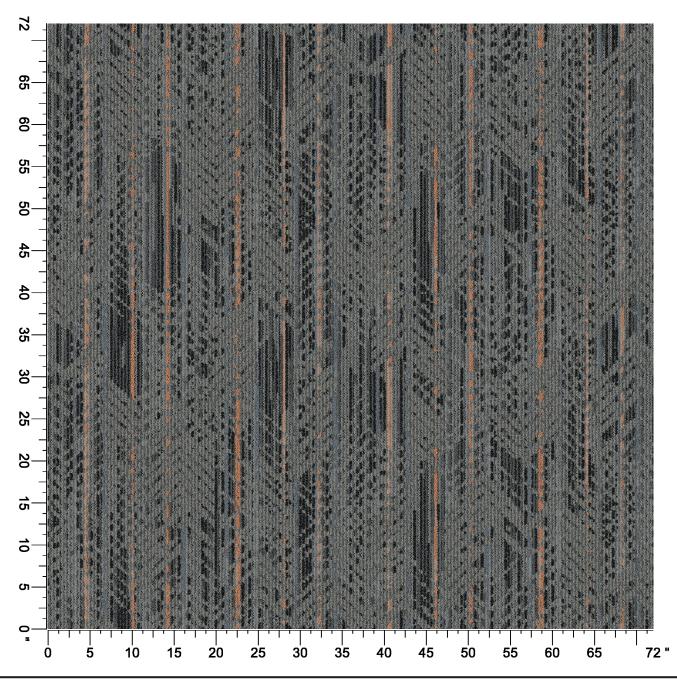

Number of Samples & Notes:



## SLEEP INN PROTO STYLE: S0948 COLOR: 284 CORRIDOR

Product Type Broadloom
Style/Color Number S0948 / 284

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Unitary

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 12

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

36 oz per sq/yd
72 oz per sq/yd
.252 in. (Approx.)
72 in. W x 72.01 in. L

## **Performance**

Traffic Class Heavy (TARR) Pill Test Pass Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction. IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



Style: S0950 / Color: 182 Repeat: 90 W X 100.68 L

Weight: 36 oz. Width: 15 ft

Type: Multi-Level Cut / Loop

**Control Number: CPT-021** 

Area: PUBLIC SPACE - BOH / Meeting Room





# SLEEP INN PROTO STYLE: S0950 COLOR: 182 PUBLIC SPACE - BOH / Meeting Room

Product Type Broadloom
Style/Color Number S0950 / 182

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Unitary

## Specifications

Size 15 ft Width
Gauge 1/10
Stitches per Inch 12

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

36 oz per sq/yd
72 oz per sq/yd
.252 in. (Approx.)
90 in. W x100.68 in. L

## **Performance**

Traffic Class Heavy (TARR) Pill Test Pass Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- 1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

Style / Color: **\$0952 / 288** Repeat: 24 W X 24 L

Weight: 36 oz. Width: 15 ft


Type: Multi-Level Cut / Loop



Control Number: CPT-022 Area: PUBLIC SPACE - Stairwells



## 1 repeat shown- not to scale

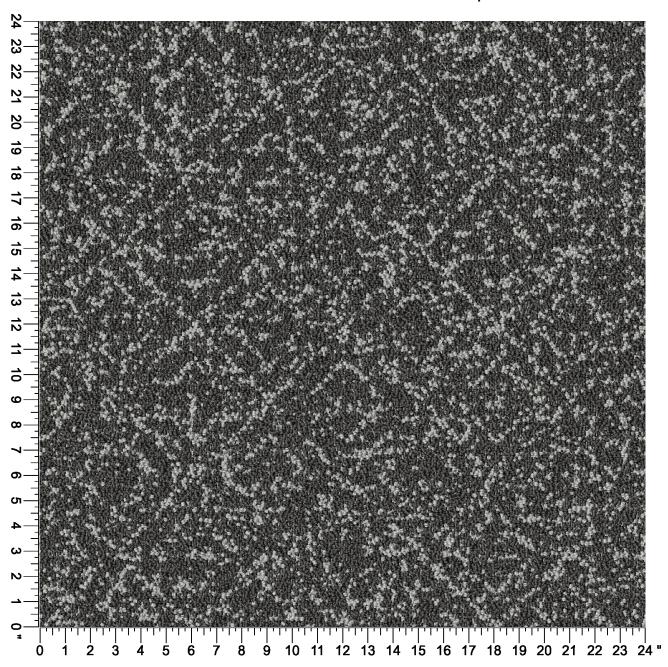



## SLEEP INN PROTO STYLE: S0952 COLOR: 288 PUBLIC SPACE -Stairwells

Product Type Broadloom
Style/Color Number S0952 / 288

Construction Multi-Level Pattern Cut/Loop
Fiber Lextron Enviro-Green Nylon

Dye Method Solution Dyed

Primary Backing Woven Polypropylene

Secondary Backing Unitary

## **Specifications**

Size 12 ft Width
Gauge 1/10
Stitches per Inch 13

Tufted Weight
Total Weight Finished
Pile Thickness Pattern
Repeat

36 oz per sq/yd
72 oz per sq/yd
.252 in. (Approx.)
24 in. W x 24 in. L

## Performance

Traffic Class Heavy (TARR) Pill Test Pass Radiant Panel Class I

Flammability ASTM E 648 Class I

Smoke Density ASTM E 662 Less than 450

LEED Info Green Label Plus Certified - GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content. Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- 2. Colors may vary slightly from dye lot to dye lot.
- 3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
- 4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



## Sleep Inn: Resilient Wall Base & Flooring, Carpet Pad

## **Product Information: Resilient Wall Base**

Control No: RB-002 Resilient Wall Base @ All Areas (All Schemes)

Style Number DC-40 Color 40 Black

Product Type **Dura-Cove Thermoplastic Rubber** 

Size 4" x 1/8" Thick x 120'
Carton Size 120LF per Carton



40 Black B



## **Product Information: Vinyl Composition Tile**


Control No: VCT-001 Vinyl Composition Tile @ BOH (All Schemes)

Style Number VCT II

Color **522 Steel Works**Product Type **Vinyl Composition Tile** 

Size **12" x 12"** 

Carton Size 45 sq/ft per carton



## **Product Information: Carpet Pad - Public Areas**

Style Number LPH32

 Weight
 32 oz / sq yd

 Dimensions
 6' x 60' (40 SY)

Sold in full roll only

Material Content 100% Pre-Consumer Synthetic

Fiber – Needle-punched and Thermal

Bonded



## Contact Us

Elle.Pechiney@tarkett.com

OR

Call Customer Service:

800-871-3211