



 **Tarkett** Hospitality



Country Inn & Suites: Gen5



Country Inn & Suites
Guestroom Broadloom
CPT-001-ALT1

Product Information

Product Type	Broadloom
Style / Color Number	CI55B / Color: 168
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac



Specifications

Size	12'
Gauge	1/10
Stitches per Inch	12
Tufted Weight	32oz per sq/yd
Finished Pile Thickness	.246 inches average
Pattern Repeat	24" x 36.01"
Total Overall Thickness	.352 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.


**Country Inn & Suites
Guestroom Carpet Tile
CP-001-ALT2**

Product Information

Style / Color Number	CI59T / 168
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed Nylon
Primary Backing	Woven PET
Secondary Backing	Ethos with Omnicoat

Specifications

Size	24"x 24"
Gauge	1/10
Stitches per Inch Tufted	10
Weight	22oz per sq/yd
Total Weight Finished	100 oz
Pile Thickness Pattern	.225 inches
Repeat	N/A
Installation Method	Quarter Turn



Performance

Traffic Class (TARR) Pill	Heavy
Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450

LEED Info Green Label Plus Certified – GLP8320

Warranty 10 Year Limited Warranty



**24" X 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites
Corridor / Elevator Cab Broadloom
CPT-002-ALT1

Product Information

Product Type	Broadloom
Style / Color Number	CI58B / Color: 168
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	12
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.281 inches average
Pattern Repeat	36" x 64.01"
Total Overall Thickness	.444 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

**Country Inn & Suites
Corridor / Elevator Cab Carpet Tile
CPT-002-ALT2**

Product Information

Style / Color Number	CI60T / 168
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method Primary	100 % Solution Dyed Nylon
Backing Secondary	Woven PET
Backing	Ethos with Omnicoat

Specifications


Size	24"x 24"
Gauge	1/10
Stitches per Inch Tufted	10
Weight	28oz per sq/yd
Finished Pile Thickness	.230 inches
Pattern Repeat	N/A
Installation Method	Quarter Turn



Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP8320

Warranty 10 Year Limited Warranty

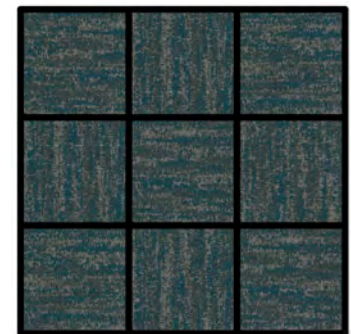

**24" X 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites
Livingroom Area Rug 1
CPT-003

Product Information

Product Type	Area Rug
Style / Color Number	CI54R Color: 652
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Non-Skid



Edge Treatment: Serge Color 8004

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	7
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.248 inches average
Rug Size	10' W x 10' L
Total Overall Thickness	.441 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn
Livingroom Area Rug 2
CPT-004

Product Information

Product Type	Area Rug
Style / Color Number	CI56R Color: 652
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Non-Skid



Edge Treatment: Serge Color 8004

Specifications

Size	12'
Gauge	1/10
Stitches per Inch	7
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.248 inches average
Rug Size	6' W x 9' L
Total Overall Thickness	.441 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty **10 Year Limited Warranty**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites
Flex / Meeting Room Broadloom
CPT-005-ALT1

Product Information

Product Type	Broadloom
Style / Color Number	CI62B / Color: 652
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Action Bac



Specifications

Size	12'
Gauge	1/10
Stitches per Inch	10
Tufted Weight	36oz per sq/yd
Finished Pile Thickness	.248 inches average
Pattern Repeat	72" x 84"
Total Overall Thickness	.441 inches average



Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty 10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites
Flex / Meeting Room Carpet Tile
CPT-005-ALT2

Product Information

Product Type	Carpet Tile
Style / Color Number	CI63T / Color: 652
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven PET
Secondary Backing	Ethos with Omnicoat


Specifications

Size	24" x 24"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	28oz per sq/yd
Finished Pile Thickness	.230 inches average
Pattern Repeat	N/A

Performance

Traffic Class	Heavy
(TARR) Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

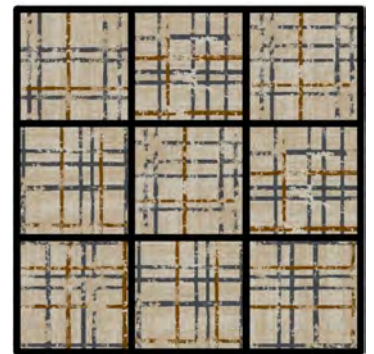

**24" X 24" RANDOM CUT TILE
 QUARTER TURN INSTALLATION**

Enviro-Green yarn has 10% pre-consumer recycled content.



Recommended for heavy (public space) carpet traffic levels.

NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
 Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.

IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites
Vestibule Inset Walk-Off Mat
CPT-007

Product Information

Product Type	Assertive Stria Carpet Tile
Style / Color Number	04839 / Color 26207 Lead Shot
Construction	Stratatec® Patterned Loop
Fiber	TDX® Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Synthetic Non-Woven
Secondary Backing	Ethos with Omnicoat

Specifications

Size	24" x 24"
Gauge	5/64
Stitches per Inch	9
Tufted Weight	28oz per sq/yd
Finished Pile Thickness	.234inches average
Pattern Repeat	N/A
Total Overall Thickness	.110inches average



24" X 24" RANDOM CUT TILE
QUARTER TURN INSTALLATION

Performance

Traffic Class	Heavy
Radiant Panel	Class I
Flammability	Passes CPSC FF 1-70 (ASTM D-2859)
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified – GLP8320

Warranty	Lifetime Limited Warranty
-----------------	----------------------------------

Modular styles with nylon face fiber are covered by a non-prorated Lifetime Limited Warranty issued by Tarkett against excessive surface wear, edge ravel, zippering, resiliency loss of backing, and delamination of the secondary backing from the primary backing containing the face fiber. Lifetime is defined as the period of time during which the product is owned and maintained by the original end-use purchaser in the original indoor installation location. Tarkett Modular products must be installed in accordance with the appropriate Modular Installation & Floor Preparation Instructions and must be maintained in accordance with Tarkett care and maintenance guidelines. The use of Tarkett primers, adhesives, and seam sealers or approved alternatives is required. Failure to conform to these requirements will result in loss of limited warranty coverage.

Moisture and pH testing requirements and limitations are defined in the Tarkett Modular Installation & Floor Preparation Instructions for each Modular product. Product or installation failure due to moisture or pH levels in excess of the limits set forth in these instructions is specifically excluded from limited warranty coverage.

Chair pads are not required, but are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.



Soiling visibility is affected by colors and patterns. Information on optimizing your selection can be found at www.tarkettna.com. **Appearance retention is not covered by this limited warranty.**

Country Inn & Suites Resilient Flooring

Resilient Flooring Product Information

Choice Spec# LVT-001 Guestroom (Optional)

Style Number	Even Plane: Walnut Allover
Color	Walnut
Product Type	LVT
Size	9.8" W x 39.4" L
Carton Size	32.3 sq ft per carton Stagger
Installation Pattern:	

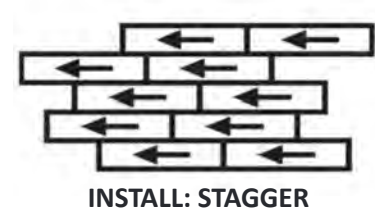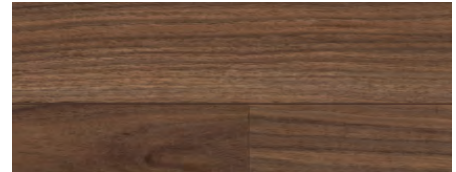

Choice Spec# VCT-001 VCT @ Back of House

Style Number	VCT II
Color	593 Mushroom
Product Type	Vinyl Composition Tile
Size	12" x 12" x 1/8" Thick
Carton Size	45 sq ft per carton (45 tiles/carton)



Country Inn & Suites Carpet Cove Base Options

Carpet Wall Base Product Information

Choice Spec# CPTB-001 Carpet Base @ Guestroom

Style Number	738S
Color	8519
Product Type	Cut pile bound carpet base
Size	4"H x 12' Strips
Carton Size	N/A
Installation	Direct Glue



Carpet Wall Base Product Information

Choice Spec# CPTB-002 Carpet Base @ Corridor

Style Number	738S
Color	8519
Product Type	Cut pile bound carpet base
Size	4"H x 12' Strips
Carton Size	N/A
Installation	Direct Glue



Carpet Stair Stringer Product Information

Choice Spec# CPTB-006 12" Stringer Base @ Stairwell

Style Number	738S
Color	8519
Product Type	Cut pile bound carpet base
Size	12"H x 12' Strips
Carton Size	N/A
Installation	Direct Glue



Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.



NOTE: Due to the manufacturing process of a tip shear product, the finished yarn weight will vary more than normal manufacturing tolerances and side match cannot be guaranteed.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104.
Carpet must be over manufacturer's recommended pad.

Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Country Inn & Suites Wall Base Options

Resilient Wall Base Product Information


Choice Spec# RB-001 Resilient Base @ Guestroom

Style Number	CB-31
Color	31 Zephyr
Product Type	Traditional Vinyl Wall Base
Size	4"H x 1/8" Thick
Carton Size	120 ft per carton
Installation	Direct Glue



Choice Spec# RB-002 Resilient Base @ Living Room / Marketplace / Breakfast Area

Style Number	MW-31-F6
Color	31 Zephyr
Product Type	Reveal - Millwork Wall Base
Size	6"H x .250" Thick x 8 ft. Lengths
Carton Size	64 ft per carton
Installation	Direct Glue




Choice Spec# RB-003 Resilient Base @ Exercise Room / Back of House

Style Number	CB-29
Color	29 Moonrock
Product Type	Traditional Vinyl Wall Base
Size	4"H x 1/8" Thick
Carton Size	120 ft per carton
Installation	Direct Glue



Choice Spec# RB-004-OPT 8"H Resilient Base

Style Number	MW-29-F8
Color	29 Moonrock
Product Type	Reveal - Millwork Wall Base
Size	8"H x .250" Thick x 8 ft. Lengths
Carton Size	32 ft per carton
Installation	Direct Glue



Every step matters

Sustainability

Every Step Matters. Tarkett's holistic approach to sustainability is woven into the fabric of how we do business and sits at the heart of our day-to-day decision making. For decades, we've scrutinized every detail of our business for its impact on resources such as soil, water, air, and climate—because when you're trailblazing a more sustainable future, every step matters.

Corporate Transparency is fundamental to our values and the way we do business. Third-party assessments serve as a testament to our performance, earning the trust of customers and partners.



EcoVadis

Tarkett is proud to have been awarded a Platinum sustainability rating by EcoVadis with a score of 81/100, which places us in the top 1% of rated companies. EcoVadis assesses CSR policies, actions, and results across four themes and 21 CSR criteria: environment, labor and human rights, ethics, and sustainable procurement.



Carbon Disclosure Project (CDP)

Tarkett's "A" score for climate change impact positions us at the leadership level of CDP's grading system.



Science Based Targets Initiative

Tarkett's 2030 carbon reduction targets are approved by the Science Based Targets initiative (SBTi). We have two 2030 targets guiding nearly every sustainability initiative at Tarkett:

1. Reduce carbon emissions by 30% across Scopes 1, 2, and 3.
2. Increase recycled content in our products from 18% in 2019 to 30% by 2030.



Start your next project with ReStart®

We're committed to creating a circular economy where nothing goes to waste. Take part by starting your next project with Tarkett's ReStart® flooring take-back and recycling program. The ReStart program will accept any type of flooring from any manufacturer. Join us as we innovate and collaborate towards a healthier future for this generation and generations to come.

Contact Us

Firstname Lastname Title

Goes Here

ChoiceOrders@tarkett.com

800-871-3211



Tarkett Hospitality

285 Kraft Drive

Dalton, GA 30721

800.871.3211

www.tarketthospitality.com

© 2026 Tarkett Hospitality