



TRU V2.3



©Tarkett Hospitality


Location: Lobby (C-05.1) & BOH (C-06.1)
Product Type: Carpet Tile
Tufted Pile Weight: 18oz
Tile Size: 9" x 36"
Backing: Flex-Aire Modular® Cushion

Style / Color	BHT1T / 865
Project Name:	HILTON TRU PROTO
Tag:	C-05.1 & C-06.1 (Lt.Gray)

Suggested Install: Refer to Prototypical Flood/Seaming Diagram



1 repeat shown- not to scale

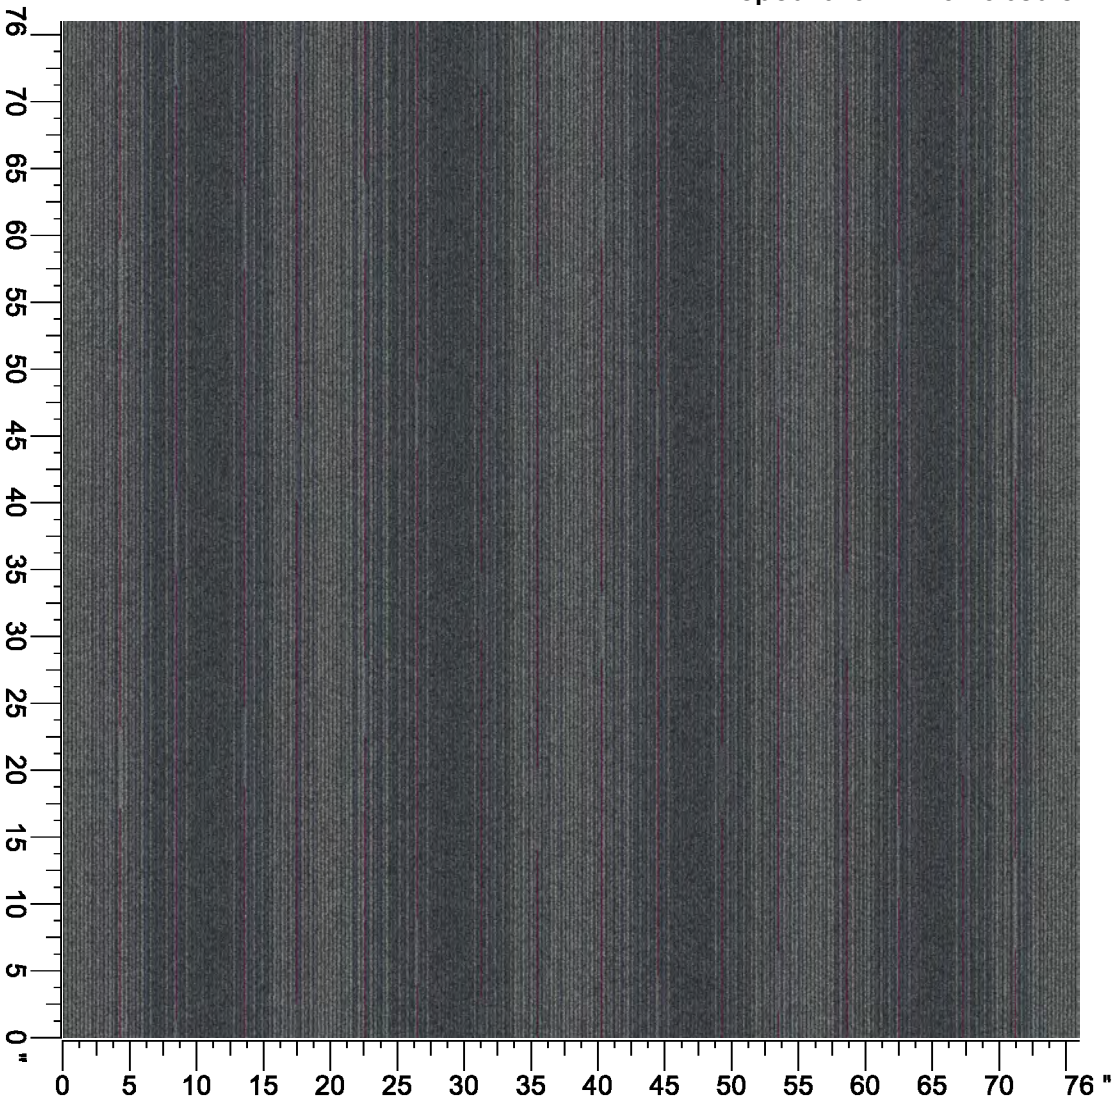

9" X 36" RANDOM CUT TILE



**Hilton Tru Proto
C-05.1 Lobby & C-06.1 BOH (Lt Gray)**

Production Tile Specifications

Style Number/Color	BHT1T / 865
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed Woven
Primary Backing	Polypropylene
Secondary Backing	Flex-Aire Modular® Cushion

Specifications

Size	9" x 36"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	18 oz per sq/yd
Total Weight	115 oz Approx
Finished Pile Thickness	.187" Approx
Total Thickness	.406" Approx

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP8320

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Install Methods

9x36

Refer to Proto Planning Package

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for moderate (guestroom) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/
CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from
linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes

1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
2. Colors may vary slightly from dye lot to dye lot.
3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.


Location: Lobby (C-05.2) & BOH (C-06.2)
Product Type: Carpet Tile
Tufted Pile Weight: 18oz
Tile Size: 9" X 36"
Backing: Flex-Aire Modular® Cushion

Style / Color	BHT3T / 895
Project Name:	HILTON TRU PROTO
Tag:	C-05.2 & C-06.2 (Dk.Gray)


Suggested Install: Refer to Prototypical Flood/Seaming Diagram



1 repeat shown- not to scale

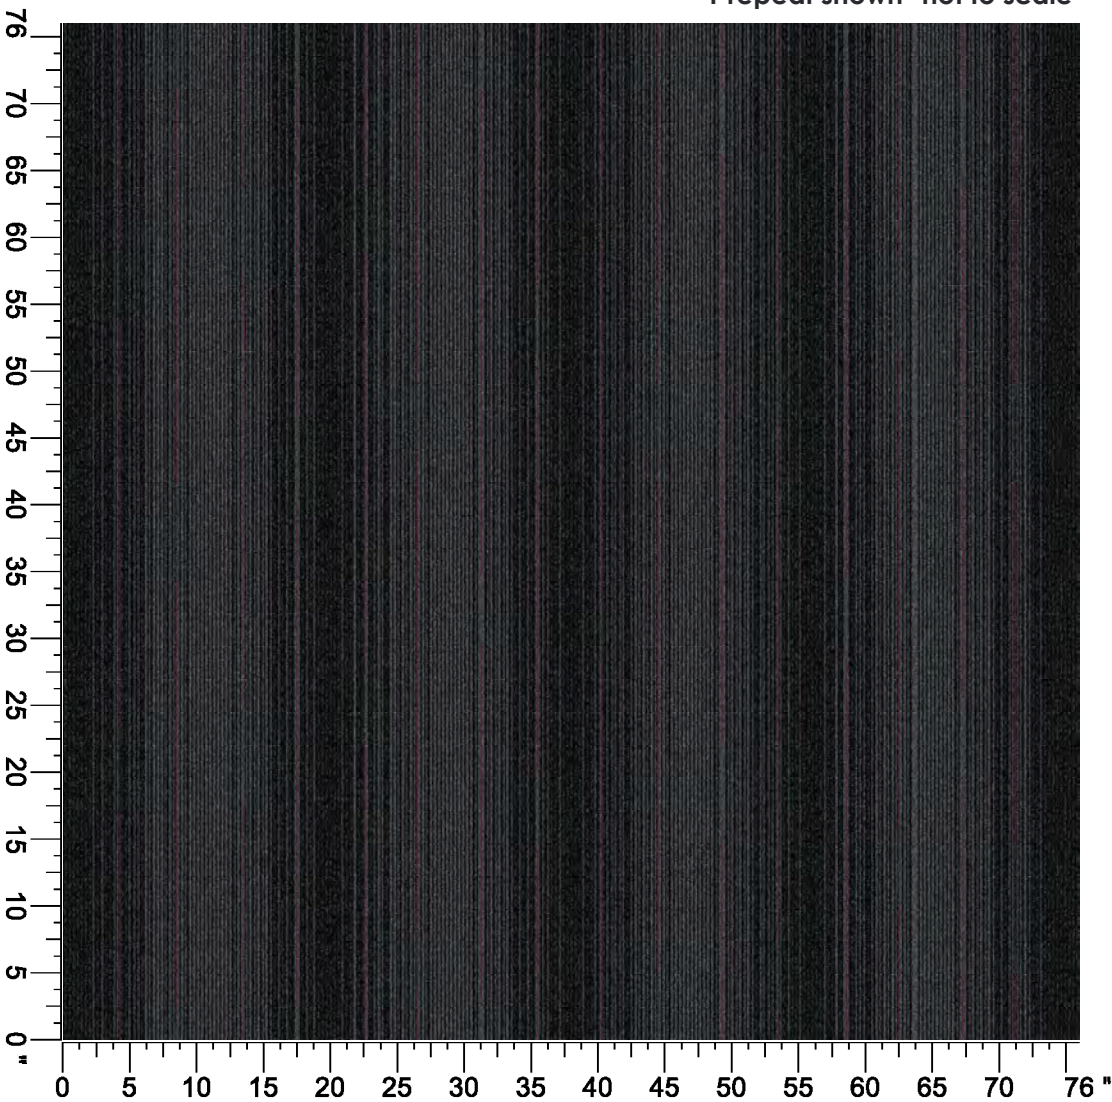

9" X 36" RANDOM CUT TILE

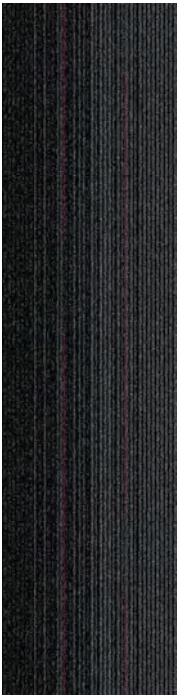

**Hilton Tru Proto
C-05.2 Lobby & C-06.2 BOH Carpet Tile
(Dk.Gray)**

Production Tile Specifications

Style Number/Color	BHT3T / 895
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed NHS
Primary Backing	Woven Polypropylene
Secondary Backing	Flex-Aire Modular® Cushion

Specifications

Size Options	9" x 36"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	18 oz per sq/yd
Total Weight	115 oz. Approx.
Finished Pile Thickness	.187" Approx.
Total Thickness	.406" Approx.

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP8320

Warranty	10 Year Limited Warranty
----------	---------------------------------

Install Methods

9x36

Refer to Proto Planning Package

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for moderate (guestroom) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/
CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from
linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes

1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
2. Colors may vary slightly from dye lot to dye lot.
3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.


Location: Corridor & Typ Elevator Lobby Carpet Tile (Accent)
Product Type: Carpet Tile
Ounce Weight: 18 oz.
Tile Size: 9" x 36"
Backing: Flex-Aire Modular® Cushion

Style / Color:	BHT5T / 856
Project Name:	HILTON TRU PROTO
Tag:	C-06.3 (Accent)

Suggested Install: Refer to Prototypical Flood/Seaming Diagram



1 repeat shown- not to scale

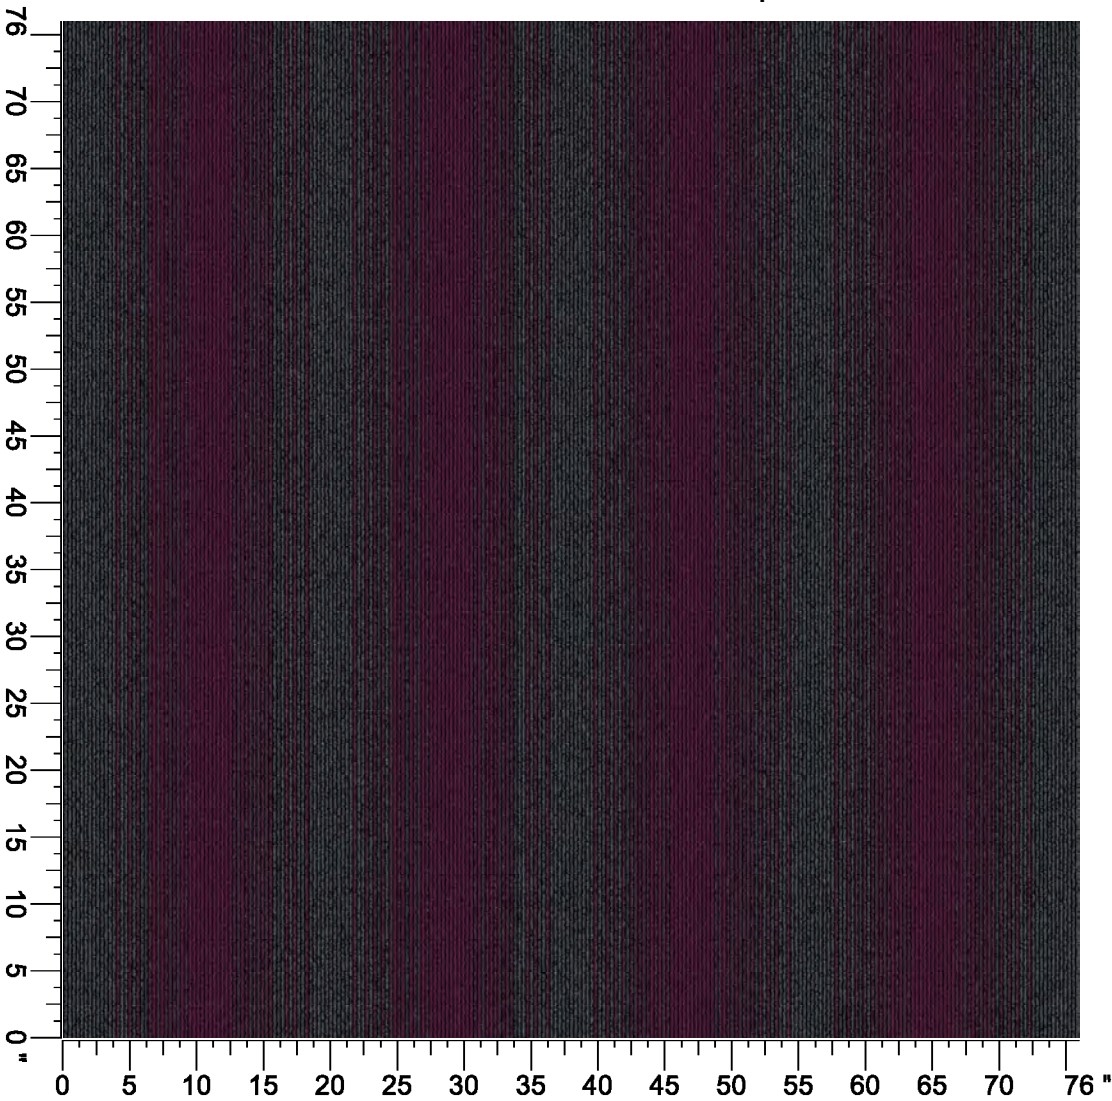

9" X 36" RANDOM CUT TILE



**Hilton Tru Proto
C-06.3 - Corridor & Typ Elevator Lobby
Carpet Tile (Accent)**

Production Specifications

Style Number/Color	BHT5T / 856
Product Type	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Flex-Aire Modular® Cushion

Specifications

Size Options	9" x 36"
Gauge	1/10
Stitches per Inch	9
Tufted Weight	18 oz per sq/yd
Total Weight	115 oz Approx
Finished Pile Thickness	.187" Approx
Total Thickness	.406" Approx

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP8320
Warranty	10 Year Limited Warranty

Install Methods

9 x 36

Refer to Proto Planning Package

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for moderate (guestroom) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/
CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from
linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

Product Notes


1. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
2. Colors may vary slightly from dye lot to dye lot.
3. U.S. Patent numbers: 4,849,267; 6,406,574, US 9,988,760 B2
4. Chair pads are recommended for optimum textural performance. Absent the use of chair pads, more intensive maintenance will be required for areas in direct contact with chair caster traffic, and some degree of appearance change is to be expected.

Location: Lobby
 Product Type: AREA RUG
 Repeat: 144.00" x188.00"
 Tufted Pile Weight: 30oz
 Production Width: 12'

Style / Color:	BHT4R / 819
Project Name:	HILTON TRU PROTO
Tag:	C-50



1 repeat shown- not to scale

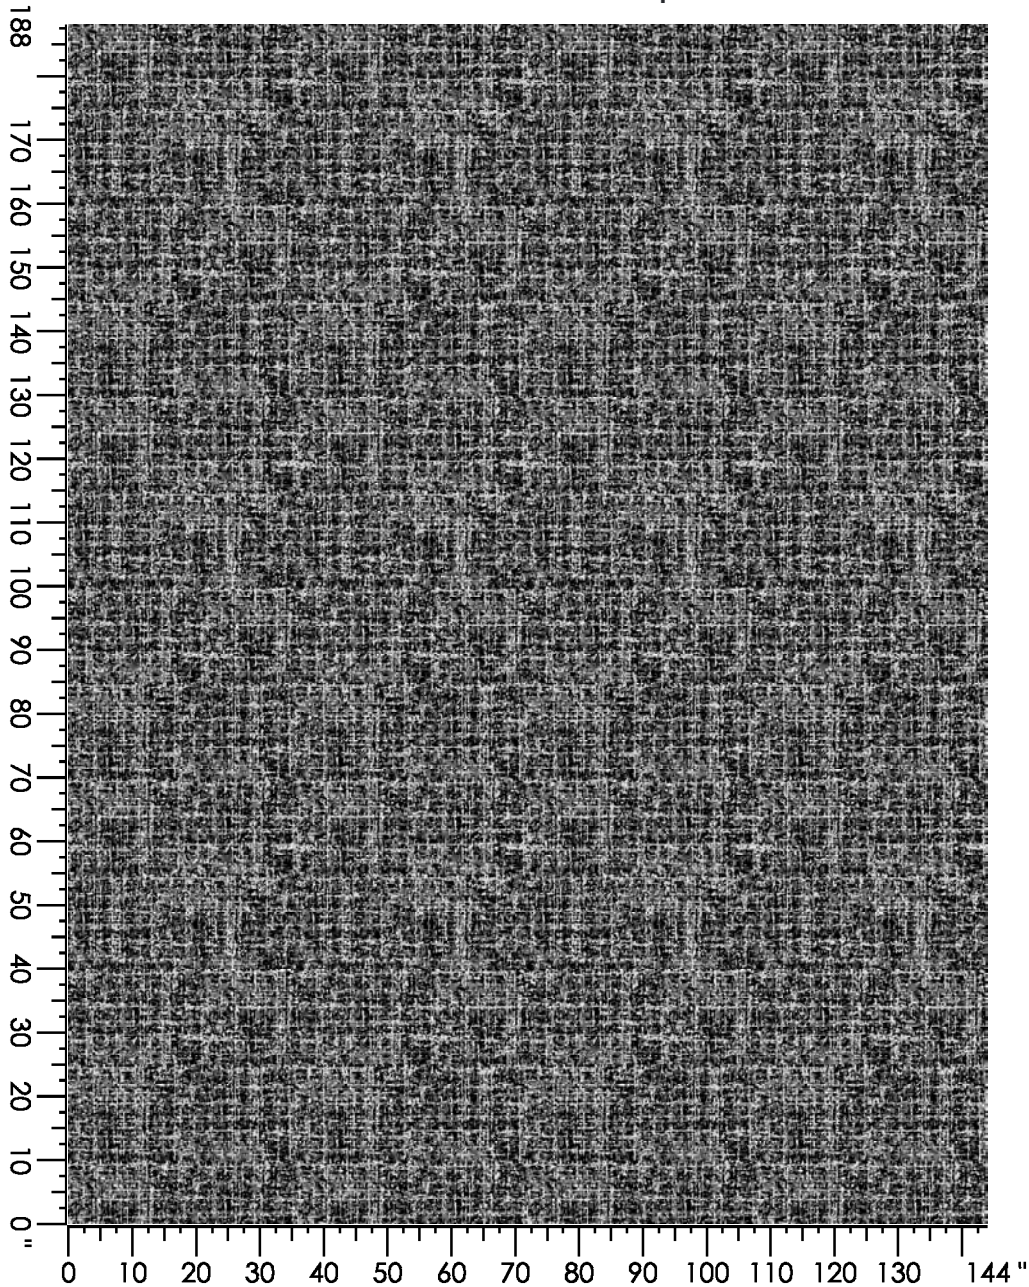

**HILTON TRU PROTO
C-50 - Lobby Area Rug**

Production Rug Specification

Product Type	Broadloom Rug
Style Number	Carpet Tile
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100 % Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary w/Non-Skid Backing

Specifications

Size	12 ft
Gauge	1/10
Stitches per Inch	9
Tufted Weight	30 oz per sq/yd
Total Weight	68 oz per sq/yd
Finished Pile	.250 in. (Approx.)
Total Thickness	.406 in. (Approx.)
Pattern Repeat	144 in. W x 188 in. L

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380
Warranty	10 Year Limited Warranty

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/
CRI-105. Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from
linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.


All Specifications subject to normal manufacturing tolerance.

Location: Stairwell
Product Type: Broadloom
Tufted Pile Weight: 36 oz.
Production Width: 12'
Repeat: 18" W x 18" L
Repeat Type: Side Match

Style / Color:	BHT2B / 90C
Project Name:	HILTON TRU PROTO
Tag:	C-04



1 REPEAT SHOWN BELOW

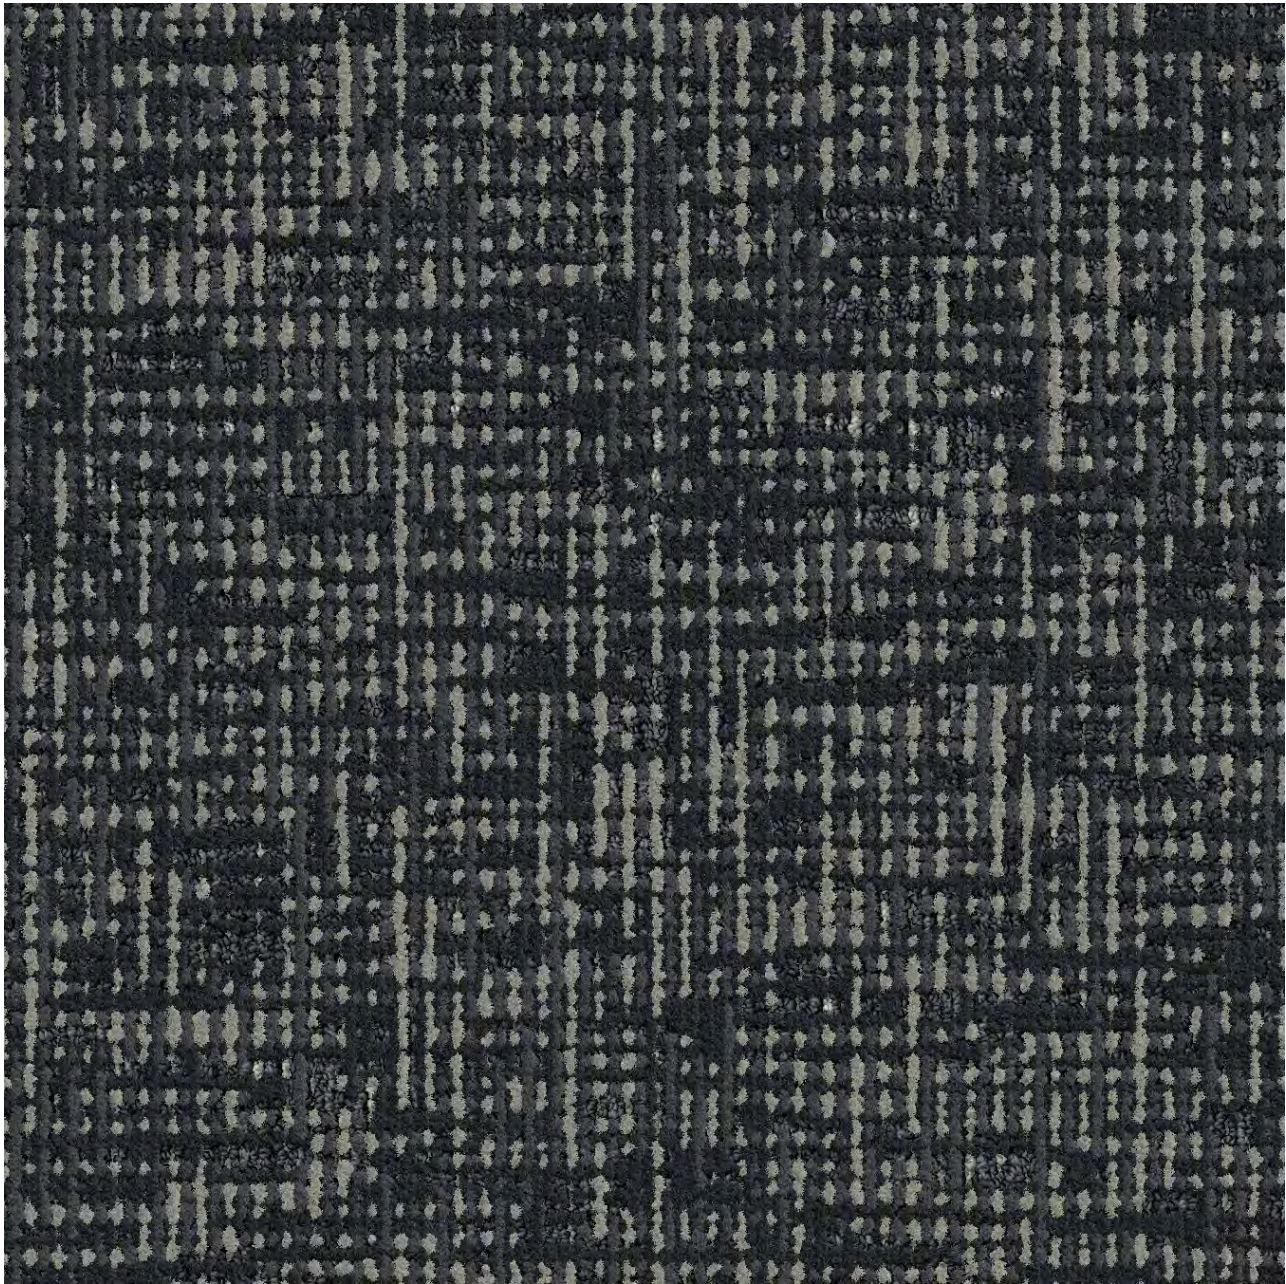

**Hilton Tru Proto
C-04 Stairwell Carpet**

Broadloom Product Specification

Product Type	Broadloom
Style Number	BHT2B / 90C
Construction	Multi-Level Pattern Cut/Loop
Fiber	Lextron Enviro-Green Nylon
Dye Method	100% Solution Dyed
Primary Backing	Woven Polypropylene
Secondary Backing	Unitary

Specifications

Size	12 ft Width
Gauge	1/10
Stitches per Inch	12
Tufted Weight	36 oz per sq/yd
Total Weight	72 oz per sq/yd
Finished Pile Thickness	.252 in. (Approx.)
Total Thickness	.343 in. (Approx.)
Pattern Repeat	18 in. W x 18 in. L

Performance

Traffic Class (TARR)	Heavy
Pill Test	Pass
Radiant Panel	Class I
Flammability	ASTM E 648 Class I
Smoke Density	ASTM E 662 Less than 450
LEED Info	Green Label Plus Certified - GLP2380

Warranty	10 Year Limited Warranty
-----------------	---------------------------------

Enviro-Green yarn has 10% pre-consumer recycled content.
Recommended for heavy (public space) carpet traffic levels.

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104/CRI-105.
Pattern streaks and banding are visually apparent streaking in patterned carpet resulting from linear juxtaposition of pattern elements visible in both length and width direction.
IT IS NOT A CARPET DEFECT, but is inherent in solution dyed graphic and cut/loop patterns.

All Specifications subject to normal manufacturing tolerance.

Tru by Hilton: Resilient Wall Base & Flooring

Product Information: Resilient Wall Base


Hilton Tag# B-01 Resilient Base @ Guestroom

Style Number	MW-TA8-F
Color	TA8 Welsh Castle
Product Type	Millwork Wall Base - Reveal Profile
Size	4.25" x .25 Thick x 8' L
Carton Size	64 LF per Carton





Hilton Tag # B-03 Resilient Base @ Lobby, Guest Corridors, Elevator Lobbies, Fitness

Style Number	MW-63-F
Color	63 Burnt Umber
Product Type	Millwork Wall Base - Reveal Profile
Size	4.25" x .25 Thick x 8' L
Carton Size	64 LF per Carton



Hilton Tag #B-05 - Resilient Base @ BOH, Stairwells, Employee Breakroom/Restroom


Style Number	CB-63
Color	63 Burnt Umber Traditional
Product Type	Vinyl Wall Base
Size	4" x 1/8" Thick x 120'
Carton Size	120LF per Carton



Product Information: Vinyl Composition Tile

Hilton Tag #VCT-01 - Vinyl Composition Tile @ Housekeeping, Laundry, Linen Storage, Employee Breakroom/Restroom


Style Number	VCT II
Color	530 Winter Storm
Product Type	Vinyl Composition Tile
Size	12" x 12"
Carton Size	45 sq/ft per carton



Product Information - Static Dissipative Tile

Hilton Tag #SPT-01 - Static Dissipative Tile @ PBX

Style Number	IQGRA
Color	0950 Black Grey
Product Type	Static Dissipative Tile
Size	24" x 24"
Carton Size	14 pcs per carton
Installation must include Copper Ground Coil COPSC	



**Hilton Tru Proto
VF-06 Guestrooms**

LVT Product Specification

Product Type	Luxury Vinyl Tile
Style Number	ACCORE-0008-7X48-VT
Construction	Rigid Core Luxury Vinyl Tile with Acoustical backing
Material	Phthalate-free, 100% Virgin Material
Edge Treatment	Micro-Bevel
Reusable Content	100% Reclaimable
Installation System	Click, Drop Lock System
Installation Method	1/3 Brick Ashlar

Specifications

Plank Size	7"x 48"
Total Thickness	5mm (0.197")
Wear Layer Thickness	20 mil (0.51mm)
Acoustical Backing Layer	IXPE (1 mm)
Sq. Ft. Per Carton	23.64 sq. ft.
Planks Per Carton	10 (23.64sq ft, 38 lbs)
Cartons Per Pallet	55

Performance

ASTM F2199	Passes
ASTM F1914	Passes (PSI Equivalent > 5,000 lbs.)
ASTM F1514	Passes
ASTM F1515	Passes
ASTM E2179	Δ IIC $\geq$ 20 dB
IIC Impact Sound Reduction Rating	IIC 68
ASTM F925	Passes
ASTM D5116	Passes < 0.1 mg/m³
Scratch/Scuff/Abrasion Properties	Excellent
Certification	FloorScore® and Assure™ Certification
Country of Origin	Made in USA

Warranty **Limited 15-year Light Commercial Warranty**



Accore - 0008

PROPRIETARY PRODUCT/MANUFACTURER

Proprietary Product: Accore Luxury Vinyl flooring is a rigid core construction engineered from the inside, out - and designed to outperform the extreme demands of today's hospitality environments. Suitable for light commercial hospitality environments such as guest rooms.


INSTALLATION

See Accore installation instructions for complete details. Floating installations do not require any adhesives. For Glue Down installations, see below:

ADHESIVES

Tarkett C-GU High Moisture Adhesive
Porous & Non-Porous Substrates: 125-150 sq. ft. per gallon


TARKETT HOSPITALITY TRU V2.3 PROTOTYPE FLOORING PRODUCT LEGEND




12' WIDE BROADLOOM
18" X 18" REPEAT
STAIRWELLS




CARPET TILE
9" X 36"
LOBBY & BOH




CARPET TILE
9" X 36"
LOBBY & BOH



CARPET TILE
9" X 36"
GUEST CORRIDOR



CARPET TILE
9" X 36"
GUEST CORRIDOR



CARPET TILE
9" X 36"
GUEST CORRIDOR &
ELEVATOR LOBBY



12' WIDE BROADLOOM
12'-0" x 15'-8" LOOSE LAY RUG
GAME AREA




STATIC DISSIPATIVE TILE
24" X 24"
PBX




VCT TILE
12" X 12"
HOUSEKEEPING, LAUNDRY,
LINEN STORAGE & EMPLOYEE
BREAKROOM/RESTROOM



LUXURY VINYL TILE
7" X 48"
GUESTROOMS




GUESTROOMS



LOBBY
CORRIDORS
ELEVATOR LOBBIES
FITNESS



BOH
STAIRWELLS
EMPLOYEE BREAKROOM
EMPLOYEE RESTROOM



CORRIDORS (OPTION)

1) This drawing and designs contained therein are the sole property of Tarkett Hospitality Carpet Mills, Inc.

2) The red dotted lines indicate known seams. Due to roll sizes and unexpected conditions that may arise, adjustment seams may become necessary during installation. Locations of cross seams are approximate. Actual layout may vary based on roll sizes.

3) All contractors using this drawing will be responsible for verifying all dimensions and yardage requirements. Tarkett Hospitality Carpet Mills, Inc. will not be held responsible for final yardage requirements.

4) These drawings are used to show the interior design intent only and should not be used for construction purposes.

5) Patterned Products require experienced and knowledgeable installation technicians. Please ensure that installers have proper equipment and are familiar with/follow Tarkett's Installation Guidelines. Please contact Technical Services for questions/to request a copy of the Installation Guidelines.

Doyle Slaughter @ (706) 581-3354
John Cox @ (706) 260-3054



1ST FLOOR PLAN

LOOSE LAY RUG
GAME ROOM
(LOCATION NOT SPECIFIED ON FINISH PLAN)




2ND - 4TH FLOOR PLAN
3 TYPICAL FLOORS

TYPICAL WALL BASE



ALTERNATE WALL BASE OPTION

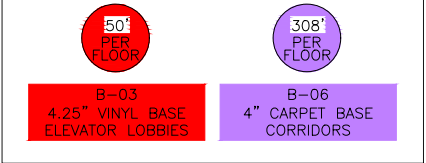

FLOOR PLANS NOT TO SCALE



1ST FLOOR PLAN



LOOSE LAY RUG
GAME ROOM
(LOCATION NOT SPECIFIED ON FINISH PLAN)



**2ND - 4TH FLOOR PLAN
3 TYPICAL FLOORS**

FLOOR PLANS NOT TO SCALE

Contact Us

HiltonOrders@tarkett.com

800-871-3211

Tarkett Hospitality

285 Kraft Drive

Dalton, GA 30721

800.871.3211

www.tarketthospitality.com

© 2025 Tarkett Hospitality